

wavelengths of light and three different polarization directions. Multiple recording layers may then be combined on a single disk, adding the final spatial dimension, to further increase the storage density. The size and shape of the gold nanorods provide the necessary selectivity for the five-dimensional recording process.

The gold nanorods are patterned through a photothermal reshaping process. This reshaping happens when a nanorod absorbs a laser pulse and heats above its melting temperature, which then causes

the nanorod to transform into a spherical particle. The nanorods selectively absorb the laser energy depending on the wavelength and polarization of the light while the threshold for photothermal melting ensures that the writing process is confined within the focal volume of the laser. The aspect ratio and orientation of the nanorods determine the wavelength and polarization sensitivity, respectively. Recordings can be imaged nondestructively using longitudinal surface plasmon resonance mediated by two-photon luminescence.

This nonlinear optical detection mechanism provides much higher angular and wavelength sensitivity compared to linear detection mechanisms used with gold nanoparticles. With the demonstrated ability to record pixel sizes close to the expected diffraction limit and in a manner free from cross-talk, this new optical recording technique has the potential to raise storage density into the terabytes for an optical disk the size of a DVD.

CHARLES BROOKS

Graphene Nanoribbon Interconnect Resistivity Comparable to Copper

The unique properties of graphene make the material attractive for a wide range of potential electronic devices. R. Murali, K. Brenner, Y. Yang, T. Beck, and J.D. Meindl at the Georgia Institute of Technology have now experimentally demonstrated the potential for another graphene application: replacing copper for interconnects in future generations of integrated circuits. In the June issue of the *Electron Device Letters* (DOI: 10.1109/LED.2009.2020182; p. 611), the researchers provide a detailed analysis of resistivity in graphene nanoribbon interconnects as narrow as 18 nm.

"As you make copper interconnects narrower and narrower, the resistivity increases as the true nanoscale properties of the material become apparent," said Murali, a research engineer in Georgia Tech's Microelectronics Research Center. "Our experimental demonstration of graphene nanowire interconnects on the scale of 20 nm shows that their performance is comparable to even the most optimistic projections for copper interconnects at that scale. Under real-world conditions, our graphene interconnects probably already out-perform copper at this size scale." Use of graphene for these interconnects could help extend the long run of performance improvements for

silicon-based integrated circuit technology.

Beyond resistivity improvement, graphene interconnects would offer higher electron mobility, better thermal conductivity, higher mechanical strength, and reduced capacitance coupling between adjacent wires.

"Resistivity is normally independent of the dimension—a property inherent to the material," Murali said. "But as you get into the nanometer-scale domain, the grain sizes of the copper become important and conductance is affected by scattering at the grain boundaries and at the side walls. These add up to increased resistivity, which nearly doubles as the interconnect sizes shrink to 30 nm."

Experimentally, the researchers began with flakes of multi-layered graphene removed from a graphite block and placed onto an oxidized silicon substrate. They used electron beam lithography to construct four electrode contacts on the graphene, then used lithography to fabricate devices consisting of parallel nanoribbons of widths ranging over 18–52 nm. The three-dimensional resistivity of the nanoribbons on 18 different devices was then measured using standard analytical techniques at room temperature.

The best of the graphene nanoribbons showed conductivity equal to that predicted for copper interconnects of the same width. Because the comparisons

were between non-optimized graphene and optimistic estimates for copper, the researchers suggest that performance of the new material will ultimately surpass that of the traditional interconnect material.

Though one of graphene's key properties is reported to be ballistic transport—meaning electrons can flow through it without resistance—the material's actual conductance is limited by factors that include scattering from impurities, line-edge roughness, and from substrate phonons—vibrations in the substrate lattice.

Use of graphene interconnects could help facilitate continuing increases in integrated circuit performance once feature sizes drop to approximately 20 nm, which could happen in the next five years, Murali said. At that scale, the increased resistance of copper interconnects could offset performance increases, meaning that without other improvements, higher density would not produce faster integrated circuits.

"This is not a roadblock to achieving scaling from one generation to the next, but it is a roadblock to achieving increased performance," he said. "Dimensional scaling could continue, but because we would be giving up so much in terms of resistivity, we wouldn't get a performance advantage from that. That's the problem we hope to solve by switching to a different materials system for interconnects."

Stream of Sand Behaves like Water

H.M. Jaeger, J.R. Royer, and colleagues from the University of Chicago have demonstrated that dry granular materials such as sands, seeds, and grains have properties similar to liquid, forming water-like droplets when poured from a given source. The finding could be

important to a wide range of industries that use "fluidized" dry particles for oil refining, plastics manufacturing, and pharmaceutical production.

Researchers previously thought dry particles lacked sufficient surface tension to form droplets like ordinary liquids.

"Previous studies of granular streams

were able to detect clustering by performing experiments in vacuum and were able to establish that the clustering was not caused by the drag from the ambient air," said Jaeger, a professor in the university's Materials Research Science and Engineering Center. "However, the cause of the clustering remained a mystery."

As reported in the June 25 issue of *Nature* (DOI: 10.1038/nature08115; p. 1110), the research team used high-speed photography to measure nanoscale forces that cause droplet formation. The researchers observed falling 100- μm -diameter glass beads, or streaming sand, and found that forces as much as 100,000 times smaller than those that produce surface tension in ordinary liquids could cause droplet formation in granular streams and cause these dry streams to behave like an ultra-low surface-tension liquid.

Royer, a graduate student in physics at the University of Chicago, who developed the apparatus, and his colleagues also directly measured grain-to-grain interactions with an atomic force microscope.

"At first we thought grain-grain interactions would be far too weak to influence the granular stream," said Royer. "The atomic force microscopy surprised us by demonstrating that small changes in these interactions could have a large impact on the break-up of the stream, conclusively showing that these interactions were actu-

ally controlling the droplet formation."

"Our experiments ask two questions for which currently there is no established answer," said Jaeger. "Both questions are about how a liquid breaks apart. How does the break-up proceed in the ultra-low surface-tension limit and what happens in the ultra-low temperature limit when particles cease to move relative to each other?"

"It is quite remarkable that a granular stream consisting of macroscopic particles provides a model system to explore it."

Lanthanide-Doped Nanocrystals Serve as Single-Molecule Imaging Probes

S. Wu, G. Han, D.J. Milliron, S. Aloni, V. Altoe, B.E. Cohen, and P.J. Schuck of Lawrence Berkeley National Laboratory (Berkeley Lab.), and D.V. Talapin of the University of Chicago have developed lanthanide-doped upconverting nanoparticles (UCNPs) that act as individual investigators of activity within a cell. These light-emitting probes represent a significant step in scrutinizing the behaviors of proteins and other components in complex systems such as a living cell.

Labeling a given cellular component and tracking it through a typical biological environment is fraught with issues: the probe can randomly turn on and off, competes with light emitting from the cell, and often requires such intense laser excitation that it eventually destroys the probe.

"The nanoparticles we've designed can be used to study biomolecules one at a time," said Bruce Cohen, a staff scientist in the Biological Nanostructures Facility at Berkeley Lab.'s nanoscience research center, the Molecular Foundry. "These single-molecule probes will allow us to track proteins in a cell or around its surface, and to look for changes in activity when we add drugs or other bioactive compounds."

As reported in the July 7 issue of *Proceedings of the National Academy of Sciences* (DOI: 10.1073/pnas.0904792106; p. 10917), the researchers developed nanocrystals containing rare earth elements—specifically, hexagonal phase NaYF_4 with multiple Yb^{3+} and Er^{3+} dopants—that absorb low-energy infrared light and transform it into visible

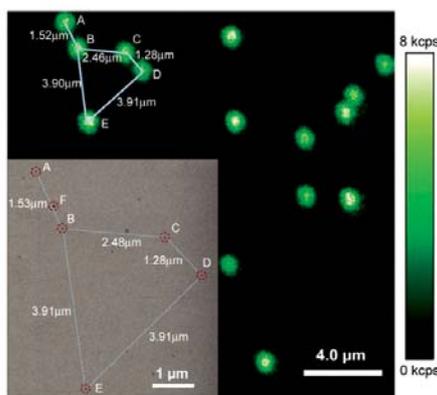


Figure 1. Confocal upconverted luminescent image of individual upconverting nanoparticles ($\text{NaYF}_4: \text{Yb}^{3+}/\text{Er}^{3+}$) on a silicon nitride membrane. Laser power density is $\sim 3 \times 10^6 \text{ W/cm}^2$, and dwell time per pixel is 10 ms. (Inset) The transmission mode-scanning electron microscope image taken at the upper left corner region of the optical image shows that the individual diffraction-limited luminescent spots are emitted from individual UCNPs. The five individual nanocrystals are labeled as A–E; an impurity is labeled as F. Reproduced by permission from *Proceedings of the National Academy of Sciences* **106** (27) (2009) DOI: 10.1073/pnas.0904792106, p. 10917. ©2009 by the National Academy of Sciences.

light (known as "upconversion") when illuminated by light from a 980-nm continuous wave, near-infrared laser (see Figure 1). Biological tissues are more transparent to near-infrared light, making these nanocrystals well suited for imaging living systems with minimal damage or light scatter.

To study how these probes might behave in a real biological system, the research team wrapped them with low molecular weight amphiphilic polymers and incubated the nanocrystals with embryonic mouse fibroblasts, cells crucial to the development of connective tissue, allowing the nanocrystals to be taken up into the interior of the cell. Live-cell imaging using the same near-infrared laser showed similarly strong luminescence from the nanocrystals within the mouse cell, without any measurable blinking or photobleaching. The researchers reported that blinking is suppressed in the nanocrystals because each nanocrystal contains many Yb^{3+} and Er^{3+} ions resulting in steady-state emission under the low-power continuous illumination. The low power illumination also essentially eliminates multiphonon fluorescence background signal that occurs with high-power laser sources.

ADITI S. RISBUD

Advertisers in This Issue

	Page No.
Hecus X-Ray Systems GmbH	558, 601
High Voltage Engineering	Inside Front Cover
Janis Research Company	615
JEOL	Outside Back Cover

For free information about the products and services offered in this issue, check http://www.mrs.org/bulletin_ads.

www.mrs.org