
MICROSCOPY TODAY

FEBRUARY/MARCH 1999

ISSUE #99-2



Imaging to Analysis in just two clicks...

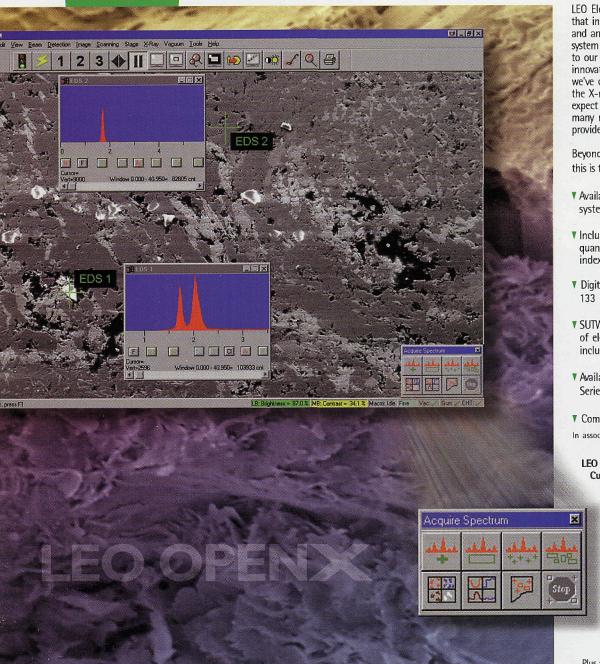

LEO Electron Microscopy understands that in a busy SEM lab, speed of imaging and analysis, simplicity of operation and system reliability are imperative. Thanks to our new 32-bit user interface and innovative programming architecture, we've created the perfect answer. All of the X-ray analysis functions you would expect to use on a routine basis, plus many more advanced facilities, are provided within the SEM user interface.

Beyond merely integrated or embedded, this is the truly *Analytical User Interface*

- Available now with IXRF Inc Iridium system
- Includes digital mapping, linescanning, quantitative analysis with position indexed spectrometry
- Digital Pulse Processing with 133 eV resolution guaranteed
- SUTW detector for detection of elements down to and including Boron
- ▼ Available for LEO 400 and LEO 1500 Series SEMs
- ▼ Complete on-line help system In association with IXRF Systems, Inc

LEO Electron Microscopy Customer Response Centres:

UK:

Telephone (44) 1223 414166 Fax (44) 1223 412776 E-mail info@leo-em.co.uk

USA:

Telephone (1) 914 747 7700 Fax (1) 914 681 7443 E-mail 70142.504@compuserve.com

Website www.leo-em.co.uk

Plus a worldwide network of dealers

...it's that simple



"Chip Wars" Heat Up On The Digital Imaging Front

Bob Chiovetti, Microimaging Technologies, Inc.

Although the Charge-Coupled Device (CCD) imaging chip is the standard in today's video and digital cameras, things may change during the coming year. The CCD chip is being challenged by a competing device, the CMOS ("C-moss") chip.

CMOS is the most widely used type of integrated circuit for memory and digital processing. Virtually everything in computers is CMOS based. The economies of scale and production of CMOS devices are the main reasons why computer prices have continued to drop during the past few years. If a device or an instrument has a microprocessor in it, chances are it includes CMOS technology..

CCD chips are one of the few exceptions to the CMOS rule. Manufacturing a CCD imaging chip is not a trivial matter, and it is costly. By the time the chips are manufactured, tested and graded for defects, the price climbs significantly. The costs, of course, get passed along to the consumer.


In spite of its cost, the CCD chip has been the best solution for digital imaging, especially in situations which require high resolution and sensitivity. Digital studio cameras, broadcast video cameras, scientific cameras and most consumer digital cameras and camcorders rely on CCD imaging devices.

CMOS imaging chips have several advantages, including very low power consumption, high-speed image digitization and transfer, simpler voltage requirements for the chip and its associated circuitry, the ability to program the chip itself for image recognition, the possibility to make much smaller cameras and other devices, and low costs.

Nonetheless, CMOS chips have historically been "noisier" than CCDs, and there have been problems getting the signal off the chip without becoming contaminated. This could cause problems in low-light level situations such as fluorescence, darkfield photomicrography and astrophotography. But this is not an insurmountable difficulty. There are filtering routines which should solve the noise problems.

Another problem is resolution. Many of the current CMOS chips are about 640×480 pixels, perhaps suitable for consumer and low-end digital cameras but not in the megapixel range that is needed to compete with 35 mm film or the current crop of larger CCD chips. Manufacturing techniques, combined with software routines during image capture, can certainly overcome this limitation. In fact one manufacturer is now offering a scientific microscope camera with a 1000×800 CMOS imaging chip.

Look for very rapid developments and refinements in CMOS imagers during the next few months, not only from industrial R&D but also from academia. Stanford University has a very aggressive program devoted to improving the performance of CMOS imagers. It's only a matter of time until CMOS chips effectively compete with CCDs, and if history is any predictor, that time should be not far off.



Front Page Image Happy Valentine's Day

The image is a transmission electron micrograph of heart tissue showing a cross section of a heart-shaped capillary almost filling the field. The capillary is surrounded by contractile units (sarcomeres, each approximately 2 microns long) and mitochondria (dark bodies).

Image compliments of Gerald E. Adomian, Ph.D., Los Angeles, CA

MICROSCOPY TODAY

The objective of the publication, perhaps unlike many others, is to present articles and other material of interest and value to the working microscopist. With contributions from our readership, we attempt to cover all aspects of microscopy. The publication is mailed, ten times a year, at no charge to some 8,200 microscopists in the United States - all of which have requested subscriptions. Due to the current relatively low number of international readers, and resulting very high postage costs, we are forced to charge the following for international subscriptions (10 issues/year):

Canada, Mexico, Latin and South America: \$40 for one year, \$70 for two years
Other International: \$55 for one year, \$95 for two years
Payment may be made by check, credit card or company purchase order.

MICROSCOPY TODAY

PO Box 620122, Middleton, WI 53562

Tel.: (608)836-1970 - Fax: (608)836-1969 - eMail: MicroToday@aol.com - http://www.microscopy-today.com Copyright in 1998 by Today Enterprises. All rights reserved.