

## Can Na<sup>+</sup> Transport Faster Than Li<sup>+</sup> inside Zn-Sb Intermetallic Nanomaterials?

Anmin Nie<sup>1,3</sup>, Yingchun Cheng<sup>4</sup>, Robert F. Klie<sup>3</sup>, Sreeram Vaddiraju<sup>2</sup> and Reza Shahbazian -Yassar<sup>1</sup>

<sup>1</sup> Department of Mechanical Engineering-Engineering Mechanics, Michigan Technological University, 1400 Townsend Drive, Houghton, Michigan 49931, United States

<sup>2</sup> Artie McFerrin Department of Chemical Engineering, Texas A&M University, 3122 TAMU, College Station, TX 77843, United States

<sup>3</sup> Department of Physics, University of Illinois at Chicago, Chicago, Illinois 60607, United States


<sup>4</sup> Mechanical and Industrial Engineering Department, University of Illinois at Chicago, Chicago, Illinois 60607, United States

Triggered by the recent exploration of alternative technologies to Li-ion batteries, sodium has strongly broken into energy storage research field thanks to the natural abundance and environmental benignity of sodium resources<sup>1,2,3</sup>. These advantages make Na-ion battery an attractive and potential alternative to the well established Li-ion battery. However, the development of Na-ion battery is currently a challenge because of potential disadvantages, including larger size of Na<sup>+</sup> and higher redox potential of Na/Na<sup>+</sup> compared to Li analogues.

Here, an in-depth comparative study between the electrochemical de/lithiation<sup>4</sup> and de/sodiation of Zn<sub>4</sub>Sb<sub>3</sub> nanowires has been conducted by using *in situ* transmission electron microscopy. Surprisingly, we found that sodium ions transport can be 10~100 times faster than lithium ion inside individual Zn<sub>4</sub>Sb<sub>3</sub> nanowires. In addition, the cracks were often observed in the first few cycles during de/lithiation of the Zn<sub>4</sub>Sb<sub>3</sub> nanowire. However, there was no crack formed even after dozens of cycles during their de/sodiation. Our *in situ* study indicates that the Zn<sub>4</sub>Sb<sub>3</sub> nanowires exhibit much better rate capability and cyclability in Na-ion battery compared to Li-ion systems. The underlying reason has also been addressed from the thermodynamic and kinetic aspects of ions transport in Zn-Sb intermetallics.

## Reference:

- [1] Slater, M. D. *et al*, *Adv. Funct. Mater.* **23**, (2013), 947  
 [2] Pan, H. *et al*, *Energy Environ. Sci.* **6**, (2013), 2338.  
 [3] Palomares, V. *et al*, *Energy Environ. Sci.* **5**, (2012), 5884.  
 [4] Nie, A. *et al*, *Nano lett.* **14**, (2014), 5301.  
 [5] The authors acknowledge the funding from the National Science Foundation (Award No. CMMI-1200383) and the American Chemical Society-Petroleum Research Fund (Award No. 51458-ND10). The acquisition of the UIC JEOL JEM-ARM200CF is supported by an MRI-R<sup>2</sup> grant from the National Science Foundation (Award No. DMR-0959470). Support from the UIC Research Resources Center is also acknowledged.

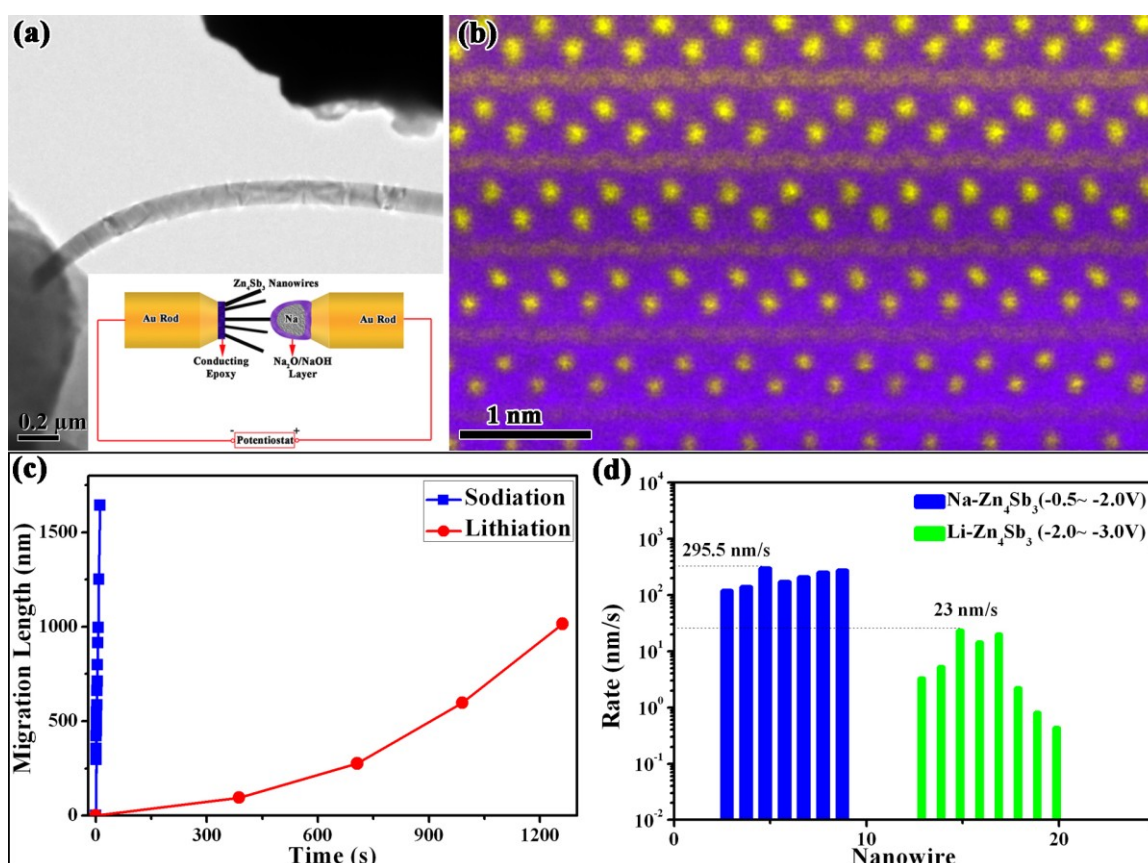

**Figure 1.** (a) Low-magnification TEM image of the *in situ* electrochemical testing setup and a schematic depiction of the nano-battery. (b) Atomic scale HAADF image of Zn<sub>4</sub>Sb<sub>3</sub> nanowire taken with the [1-10] zone axis. (c) Typical reaction front travel distance vs time curves for sodiation and lithiation, respectively. (d) Comparison of sodiation and lithiation rates of Zn<sub>4</sub>Sb<sub>3</sub> nanowires. Sodiation rates of Zn<sub>4</sub>Sb<sub>3</sub> are about 10~100 times faster than their lithiation rates.