

Comparison of Approaches to Photometric Redshift Estimation of Quasars

Yang Tu, Yan-Xia Zhang, Yong-Heng Zhao & Hai-Jun Tian

Key Laboratory of Optical Astronomy, National Astronomical Observatories, Chinese Academy of Sciences, 20A Datun Road, Chaoyang District, 100012, Beijing, P.R.China
email: tyang@bao.ac.cn

Abstract. We probe many kinds of approaches used for photometric redshift estimation of quasars, including KNN (K-nearest neighbor algorithm), Lasso (Least Absolute Shrinkage and Selection Operator), PLS (Partial Least Square regression), ridge regression, SGD (Stochastic Gradient Descent) and Extra-Trees.

Keywords. Photometric redshifts, quasars, data mining, machine learning

1. Sample and Methods

The sample is cross-identified by SDSS DR7, UKIDSS DR8 and ALLWISE. 24,089 quasars are obtained (Zhang *et al.* 2013). Based on the input pattern $10C + r$, the performance of KNN, Lasso, PLS, Ridge, SGD, Extra-Trees are compared in figure 1.

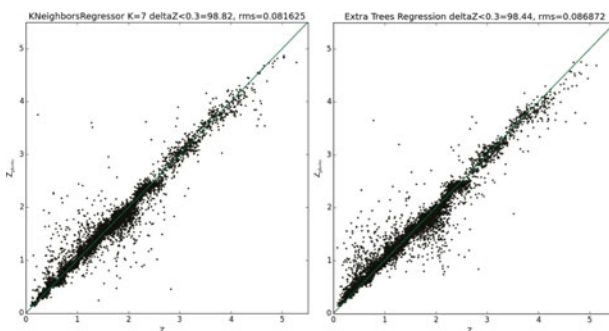


Figure 1. The first: the photometric redshift estimation by KNN ($k = 7$); the second: the photometric redshift estimation by Extra-Trees (estimator = 90); the third: comparison of photometric redshift estimation by six approaches.

2. Conclusions

The experimental results show that when the input pattern $10C + r$ is adopted, KNN has the best performance, Extra-Trees has better performance, the others achieve bad accuracy.

Acknowledgement

This paper is funded by National Key Basic Research Program of China 2014CB845700 and National Natural Science Foundation of China under grants No.11178021, No.11033001, NSFC-TAMU Joint Research Program No.11411120219.

Reference

Zhang Yanxia, Ma He, Peng Nanbo, Zhao Yongheng, Wu Xue-bing, *AJ*, 2013, 146, 22 (10pp)