

Research Article

Cite this article: Horváth I (2021). Connectors of smart design and smart systems. *Artificial Intelligence for Engineering Design, Analysis and Manufacturing* **35**, 132–150. <https://doi.org/10.1017/S0890060421000068>

Received: 21 January 2021
Revised: 7 March 2021
Accepted: 8 March 2021
First published online: 19 April 2021

Key words:

AI-enablers; comprehension and utilization; connectors; smart design; smart systems

Author for correspondence:

Imre Horváth,
E-mail: i.horvath@tudelft.nl

© The Author(s), 2021. Published by Cambridge University Press. This is an Open Access article, distributed under the terms of the Creative Commons Attribution licence (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted re-use, distribution, and reproduction in any medium, provided the original work is properly cited.

Imre Horváth

Faculty of Industrial Design Engineering, Delft University of Technology, Landbergstraat 15, 2628CE Delft, The Netherlands

Abstract

Though they can be traced back to different roots, both smart design and smart systems have to do with the recent developments of artificial intelligence. There are two major questions related to them: (i) What way are smart design and smart systems enabled by artificial narrow, general, or super intelligence? and (ii) How can smart design be used in the realization of smart systems? and How can smart systems contribute to smart designing? A difficulty is that there are no exact definitions for these novel concepts in the literature. The endeavor to analyze the current situation and to answer the above questions stimulated an exploratory research whose first findings are summarized in this paper. Its first part elaborates on a plausible interpretation of the concept of smartness and provides an overview of the characteristics of smart design as a creative problem solving methodology supported by artificial intelligence. The second part exposes the paradigmatic features and system engineering issues of smart systems, which are equipped with application-specific synthetic system knowledge and reasoning mechanisms. The third part presents and elaborates on a conceptual model of AI-based couplings of smart design and smart systems. The couplings may manifest in various concrete forms in real life that are referred to as “connectors” in this paper. The principal types of connectors are exemplified and discussed. It has been found that smart design tends to manifest as a methodology of blue-printing smart systems and that smart systems will be intellectualized the enablers of implementation of smart design. Understanding the affordances of and creating proper connectors between smart design and smart systems need further explorative research.

Introduction

The word “smart” is included twice in the title. Interestingly, the meanings of this word in the two contexts are somewhat different. This is a typical example of the ambiguities caused by the use of this word as a general adjective in largely different contexts. This also casts light on definitional issues that can be found in the professional literature, which often uses the term “smart” as a jolly joker. Therefore, let us elaborate further on the meanings of smartness in the context indicated by the title. However, it must be mentioned before everything that the practice of design, as well as the theories of design, goes through subsequent paradigmatic changes due to external influences and internal necessities. A fact of the matter is that the focus of value generation, artifactual paradigms, enabling technologies, applied methodologies, and business strategies of design are continually enriched (Fig. 1). While useful products and manageable processes were in the focus of industrial design engineering before and in the 1950, the attention shifted to multi-disciplinary systems and related services in the 1980s (Horváth, 2020a). In addition to paying attention to products and services (Biehl, 2017), the concepts of environments and experiences appeared as part of a paradigmatic shift at the turning of the present century. Neuhüttler *et al.* (2017) provided an example of considering value propositions in the development of smart service business models. Smartness can be associated with all forms of value propositions, but it will have a different flavor in each case. Unfortunately, there are only tentative definitions for smart experiences, smart environments, smart systems, and so forth.

The starting point of our discussion can be that, in human behavioral context, “smart” means (i) behaving with above-average logical reasoning skills, (ii) successfully applying them to solve technical, scientific, social, economic, and political problems, and (iii) having pragmatic, emotional, and ethical concerns. This circumscription has two direct implications: (i) smart humans/systems are better at solving problems than others and (ii) what helps better solve problems also makes the problem solver smarter. Thus, smartness is a measure of the ability to act in a situation based on innate competences and the knowledge and information known. This explains why smart is often associated with the actions and ability to navigate in an unknown place, or solving complicated puzzles, or convincing others about the truth of a claim.

Even if philosophical studies and speculations are also considered, the literature seems to be incomplete on the fundamentals of smartness in nonhuman contexts. Notwithstanding, there are some seminal and influential works that warrant more attention and exposition (Adams, 2012). Many authors put an equal sign between smartness and intelligence as a characteristic

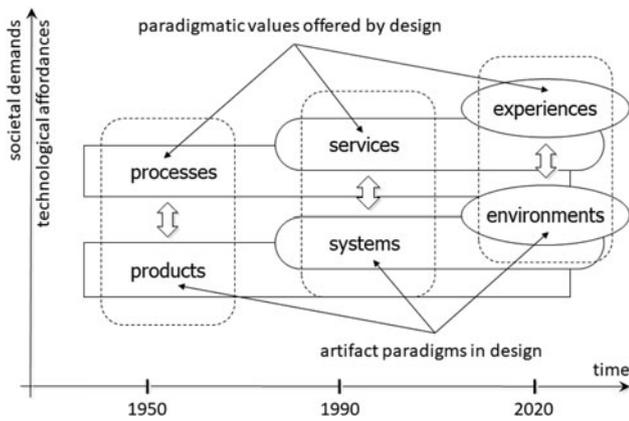


Fig. 1. Shifting artifact paradigms and value generation in design.

of behavior and capabilities (Shang and You, 2019). They consider smartness and intelligence as synonyms and use these two terms interchangeably (Wang, 2019). However, we consider them different and demarcate the two notions in this paper, in particular in the context of intellectualized engineered systems (IESs). The bottom line is that we consider intelligence as an ultimate experiential manifestation of being and behaving as human (Herring, 1925). As a native gift, it is generic, global, and multifaceted. On the other hand, smartness is specific, localized, and purposeful. These two natural phenomena have different indicators and measures (Rosenblueth *et al.*, 1943).

Rough thoughts on smartness versus intelligence identify discriminators such as awareness versus consciousness, reasoning versus thinking, acquiring versus learning, and self-enhancement versus self-adaptation. Personal intelligence is considered as a kind of given (IQ of individuals is supposed to be stable as they age), while personal smartness is accepted as changing with intellectualization, practicing, and experiencing. Intelligence is often considered a measure of the ability to learn (Meisenberg and Lynn, 2011). This suggests that intelligence is an intrinsic general property. Smartness is not about the probability but more about the rate of accumulation of competences, knowledge and information of an individual. A human or a system can become smarter by improving the competences through practicing and obtaining more

relevant information and knowledge (Rindermann and Ceci, 2009). Eventually, it is the ability to survive through any means.

The reproduction of human smartness in IESs is a current hot issue. It is assumed that system smartness means that the access and extraction of information and knowledge for/by IESs is not static and that they may exhibit evolving problem solving capabilities. And this is where artificial narrow intelligence (ANI) comes to the scene (Alippi and Ozawa, 2019). Current artificial intelligence is an eclectic body of unintegrated knowledge. Several constituents and manifestations of ANI have been developed and studied, and artificial general intelligence (AGI) and artificial explainable intelligence (AEI) research have gained a lot of impetus in the last decade. Three basic and generic forms of artificial intelligence are distinguished: (i) assisted intelligence, (ii) augmented intelligence, and (iii) autonomous intelligence. They offer a rich and rapidly growing set of problem solving technologies. Enabling system-level smartness by applying ANI or AGI or AEI technologies is in the center of current cognitive systems research and development, but its future possibilities and implications are seen and judged differently (Ren and Chen, 2019). As shown in Figure 2, four conflicting worldviews and philosophical positions are competing. For this reason, the future situation does not seem to be clear in the present days, even if the technological trends and future affordances are considered.

We claim that ANI is not more and not less than a popularized and ambitious formulation of the name of a wide but the fragmented domain of research in reproducing various manifestations of human intelligence. In the framework of cybernetics, intellect is achieved by a subsequent integration and abstraction of data, information, and knowledge. We are treating data, information, and knowledge as three distinct tiers. Data are regarded as a collection of facts, information is the meaning of interrelated data, and knowledge is the problem solving power of integrated and abstracted information, while intellect is the ability of properly applying knowledge in various and varying contexts. Sensors gather signals and convert them to data. Information structures capture and encode relations among data and expose their meaning. Advanced reasoning mechanisms (such as artificial neural networks) discover relationships hiding in massive data streams and convert it into patterns of knowledge. Context management learns the conditions (meta-knowledge) of the proper application of problem solving knowledge.

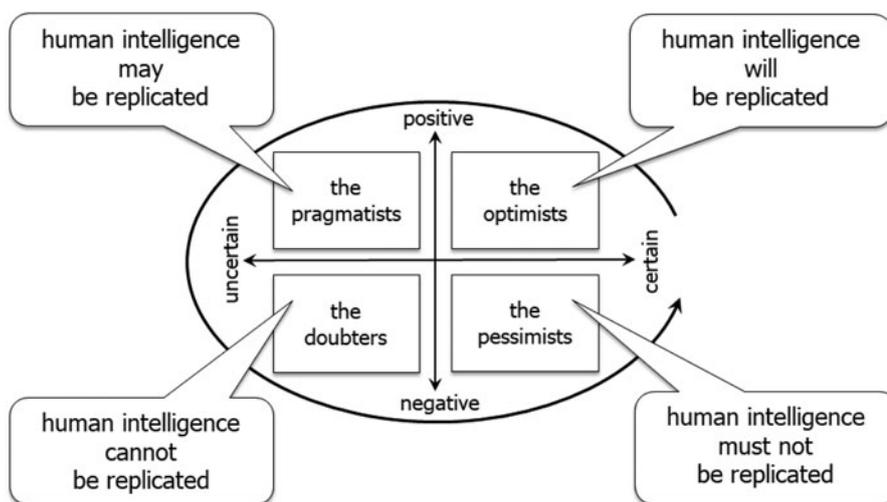


Fig. 2. Positions concerning the current and future status of artificial intelligence.

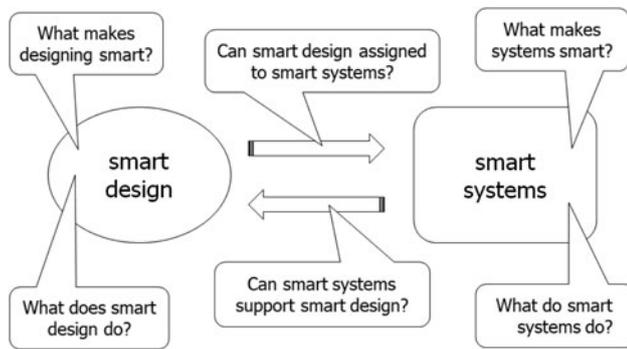


Fig. 3. Major questions concerning relationships.

Considering all the facts and issues, what does smart mean in the context of design processes and engineered systems, or in a combined context? The major questions about the essence and forms of relationships between smart design and smart systems are indicated in Figure 3 (Horváth, 2020a). What does smart design have to do with smart systems and what do smart systems have to do with smart design? What is smart design of smart systems? What does connect them? These questions will be addressed in the rest of this paper.

Part 1: Smart design

Dual nature of design smartness

The dual nature of design smartness mentioned in the title of this subsection originates in the word “design” itself, which is used here as an adjective, but it can refer either to a purposeful process or to a purposeful artifact. Both the process and the artifact can be smart, but differently. The fact of the matter is that we focus on the smartness of the design process, since the concept of “purposeful” artifacts eventually leads us to the domain of smart systems. How can the phenomenon (observable process and activities) of smart design be defined with simple terms? Perhaps the simplest definition would be: Smart design is a process enabled by artificial intelligence. However, this definition does not claim more than saying: a house is heated by gas or a vehicle is fueled by petrol. Therefore, for a better articulation, a more detailed definition is deemed to be necessary. The fact is that confusingly abundant definitions of “smart design” can be found in the literature that divides according to whether they concern the design process or the design artifact. Some representative definitions are as follows: “Smart design is for complex challenges”; “Smart design is data-based design”; “Smart design is the use of artificial intelligence technologies in design problem solving and management”; “Smart design is the design approach associated with smart systems”; “Smart design is what brings the user experience to its ultimate limits”; “Smart design is the form of self-adaptation of intelligent systems”; “Smart design operates as if by human intelligence by using automatic computer control”; “Smart design humanizes products, services and experiences through deep research, technological insights, and design strategies”; “Smart design operationalizes the S.M.A.R.T. principles (specific, measurable, actionable, realistic, and time-based) in the context of creative practice”; “Smart design is simultaneous thinking inside the box and outside the box”; and so forth.

It is known and widely accepted that design processes (i) are intellect-based, meaning that they simultaneously need data,

information, knowledge, and wisdom; (ii) are dedicated to novel products, services, and other values; and (iii) use exploration, intuition, systematics, heuristics, reasoning, etc. to devise solutions. If this is correct, then what differentiates a smart design process? Pencil-aided design and computer-aided design are seen as an intrinsic creative human activity, which assumes design intuitions, thinking and composition. As a problem solving process, it is characterized by (i) information and knowledge aggregation, processing, and assessment; (ii) extensive search for design solutions; and (iii) combined application of synthesis, analysis, simulation, prototyping, and evaluation actions. However, smart design has different relationships with learned human professionals. Some writers stated that any design method/methodology dealing with a part or the whole of a design process with a smart technology will constitute a smart designing process.

But what designers actually do when they do smart designing? Smartness makes it possible for designers to get additional intelligence, analyze on a wider basis, decide more objectively, and operate under uncertain circumstances, not just in dynamic circumstances. Schuh *et al.* (2019) discussed that smart products are based on digitized (or cyber-physical) products, which consist of physical, intelligent, and connected components, and are capable of a digital upgrading through internet-based services. In their view, the primary function(s) must remain in place in smartification. Vroom and Horváth (2014) used the term cyber-physical augmentation to describe the process of equipping conventional products and systems with smart functionality. Ko *et al.* (2012) also exemplified that cyber-physical augmentation can introduce novel primary functions. In another research project, the term “cognitive engineering” was adopted and adapted to describe the interconnected processes of (i) intellectualization of product/systems and (ii) designing physical, cognitive, and affective interaction of humans with smart products/systems (Horváth, 2020b).

It was discussed that the objective of the cognitive engineering of ANI-enabled smart products is to ideate surprisingly genuine and useful behavioral functions and behaviors, such as awareness building, abductive reasoning, operation forecasting, apobetic interaction, and conditioned self-adaptation. Other authors argued that the cognitive engineering also aims at optimizing “human-in-the-loop” and “system-in-the-loop” situations (Woods and Roth, 1988; Roth *et al.*, 2002). We believe that, in addition to these, smart designing needs a novel design thinking, which takes counts on the changing role of the subject of design in terms of goal definition and process implementation. It has to be mentioned that we do not have a specific model of design thinking yet that would simultaneously enable researchers, developers, and designers to implement computational support systems, facilitate research, guide education, or support interdisciplinary collaboration in the field of smart design of smart systems.

On the other side of the coin are smart products, services, and experiences as the manifestation of smart designs. This area is still facing an even more intrinsic definitional challenge. The issue is what establishes a smart design (as a value generator)? In the industrial practice, information and communication technologies have been merged into common domestic products and they were called smart. Some say that the products affected mainly by the Internet of Things are smart products (Bello and Zeadally, 2019). In this view, various goal-driven combinations of hardware, software, and cyberware technologies endow products with smart functionality. Obviously, this kind of simplifications fails to provide a proper characterization of smart products. The following concise overview of the related publications casts lights

on more articulated definitions that consider important functional, implementation, and operational features too.

Bonner (1999) addressed the implications of using intelligence in consumer products. Gutierrez *et al.* (2013) tried to provide a consensus definition for the term “smart product,” but ended up with a conclusion that the distinguishing characteristics of smart products and intelligent products are similar. This conclusion that the term “intelligent product” is a synonym of “smart product” is also proposed by the paper of Filho *et al.* (2017). Actually, are there any features (functions, arrangements, behavior, etc.), which a design should necessarily exhibit to qualify as a smart product? Wuest *et al.* (2018) proposed pro-activeness as a necessary characteristic to arrive at intelligent products. Rijdsdijk and Hultink (2009) proposed a set of abilities (dimensions) to collectively characterize smartness of current and future smart products, namely (i) autonomy, (ii) adaptability, (iii) reactivity, (iv) multi-functionality, (v) ability to cooperate, (vi) human-like interaction, and (vii) personality. Having these, smart products show a range of capabilities that can only be found in nonsmart products to a limited extent. In their study, they measured the reflections of stakeholders on smart products in terms of innovation attributes such as (i) relative advantage, (ii) compatibility, (iii) observability, (iv) complexity, and (v) perceived risk. According to the technology-oriented definition of Abramovici (2014), smart products are cyber-physical systems (CPSs) defined as intelligent mechatronic products capable of communicating and interacting with other CPSs by using different means such as Internet or wireless LAN. In addition, Abramovici *et al.* (2016) argued that virtual twins are integrative components of smart products.

Hicking *et al.* (2018) claimed that, in order to maintain or improve their competitiveness, SMEs must transform their existing business models considering new smart products and/or the smartification of already existing products. Chowdhury *et al.* (2018) discussed that the use of smart technologies and components such as sensors, wireless connectivity, control systems, and machine-embedded software has led to a new generation of industrial product-service systems that are called smart product-service systems (S-PSSs). They reviewed the state of progress in the field of S-PSSs and found that S-PSSs are characterized by digital resource-driven value creation processes and business models and offer novel value-creating features such as (i) boundary spanning with digital boundary objects, (ii) intelligent dynamic functional capabilities, (iii) active value creation with customers through digital resource integration, (iv) using digital platform for value co-creation, (v) employing new business models based on S-PSS packages and smart automation services, and (vi) using product generated digital data for improved customer relationship and PSS redesign.

Smart products need to exploit more far-reaching self-organization approaches beyond service composition as investigated in “mainstream” (semantic web) service-orientated software research (Gold *et al.*, 2004). Furthermore, as Mühlhäuser (2008) argued, smart products can be conceived as “services” from the IT perspective and can leverage off intensive research on “service composition” and sub-issues like service (self-)description and discovery, orchestration and choreography this way. Based on these considerations, he proposed the following “early” definition: “A smart product is an entity (tangible object, software, or service) designed and made for self-organized embedding into different (smart) environments in the course of its lifecycle, providing improved simplicity and openness through improved product-to-user and product-to-product interaction by means of

context-awareness, semantic self-description, proactive behavior, multimodal natural interfaces, AI planning, and machine learning.” Artificial intelligence technologies also contributed to the development of personalized interface agents for high functionality interfaces that can operate over a broad spectrum of interaction tasks (Handosa *et al.*, 2020).

The necessity of a more detailed definition is underpinned by the need to exactly specify: (i) who executes or what establishes a smart design process? (ii) what is the subject of a smart design process? (iii) what is the objective of a smart design process? (iv) how is a smart design process conducted? (v) what intellect is used to enable a smart design process? and (vi) what are the affordances and limitations of smart design processes? Like conventional and computer-aided design, smart design also includes creative and reflective design actions. There is a difference between smart design and knowledge-intensive computer-aided design, the latter being supported by (i) lifecycle information management (Yang *et al.*, 2007), (ii) multi-disciplinary collaboration of teams (Zha *et al.*, 2003), and (iii) using knowledge warehouses and design ontologies (Sun *et al.*, 2010). In a smart design process, the role of humans is changed. It is also an issue of smart design processes to what extent the decision-making and inference mechanism are intervened by humans. Current smart design approaches intend to make designing smarter by including means that support increasing and automating problem solving competences (Parasuraman *et al.*, 2000). A smart design process often implies that designers are assisted by some sort of tools or platforms, which can offer some good/better outcomes/options, for example, when designers do not necessarily have to be involved in the decision making (Bucklin *et al.*, 1998). The resources (enablers) of a smart design process are AI-means, knowledge bases, inference engines, validation mechanism, etc. As a bottom line, smart design is closely related to (and is dependent on) structured design thinking and system thinking (Adams *et al.*, 2014).

Essence of smart designing

The very essence of smart designing is smartification, which may work toward many different objectives (Luis-Ferreira *et al.*, 2019). As defined by Schuh *et al.* (2019), smartification is understood as the digital refinement of an existing product by embedding digital technologies and smart services. In this intentional framework, theories, methods, technologies, competences, and applications play an equal role. On the one hand, independent from the form of value generation, smartification intends to realize several distinctive characteristics of (smart) value carriers, such as (i) personalization (customization according to the unique characteristics and needs of the stakeholders), (ii) connectedness (opportunity of communicating, integrating, and bundling with other systems), (iii) situatedness (monitoring dynamic internal/external circumstances and influential effects in order to maintain optimal operation), (iv) awareness (consideration of changing and emerging objectives, resources, situation, and constraints), (v) adaptiveness (changing operational goals according to new conditions and affordances), and (vi) proactivity (anticipation of stakeholders’ intentions and plans and new affordances). On the other hand, smart design should cope with many challenging paradigmatic features of value carriers, such as (i) heterogeneity (designing hardware, software, and cyberware constituents in synergy), (ii) compositionality (holism of top-level system operation), (iii) timeliness (operation without time delay (zero-time) or working in near-zero time), (iv) controlling (implementing supervisory

and self-control as human-in-the-loop and system-in-the-loop), (v) automation (augmenting interactive operation with autonomous task execution, and (vi) dependability (ensuring security, safety, reliability, resilience, and other operational characteristics).

There is a wide range of enablers for smart design (Zheng *et al.*, 2019). They include analog and digital hardware means, software and media tools, as well as learning/reasoning mechanisms, and cyberware including (big) data, synthesized information, and human and system knowledge. As concrete resources, smart designing blends: (i) human creativity, intents, abilities, competencies, and experiences, (ii) networked physical and virtualized computing environments (such as edge, fog, and cloud computing), (iii) penetration into real-life processes and generation of lifecycle-related big data, information, knowledge, and meta-knowledge, (iv) integrated warehouse of manual and digital ideation, conceptualization, architecting, modeling, analysis, simulation, tools, etc., and (v) tailored problem solving intellect offered by artificial intelligence approaches. In combination with traditional design methods, the framework of generative design utilizes ANI and knowledge representation techniques to generate better designs in a shorter time (Akinsolu *et al.*, 2019).

Industrial smart design is not separable from the downstream activities of production flows, and smart design cannot neglect smart manufacturing (SM) processes (Subramanyam and Lu, 1991). According to Wang *et al.* (2018), SM refers to a new manufacturing paradigm, where manufacturing machines are fully connected through wireless networks, monitored by sensors, and controlled by advanced computational intelligence using advanced data analytics to complement physical science to improve product quality, system productivity, performance, decision making, and sustainability while reducing costs. SM is an immediate objective in the consumer goods industries, which are driven by fast-changing customer demands and, in some cases, tight regulatory frameworks, and their progress strongly depends on digitalization, digital transformation, and the use of large datasets together with predictive models and solution-finding algorithms (Dai *et al.*, 2015). The use of data, models, algorithms, and computer control is supposed to optimize the whole supply chain in the production of manufactured products (Litster and Bogle, 2019). The core element is the data-driven smartness.

Problematics of a smart design methodology

Some researchers expose smartification as the doctrine of “smart designing of anything.” It is possible, in principle, but actually the doctrine largely depends on the artifactual paradigm and the practice of value generation. Smart design is not computational design or automated design or axiomatic design, but a sophisticated design process completed by a synergistic cooperation of human experts and intellectualized systems. As mentioned earlier, it is enabled by an extensive utilization of AI-based system resources (Smithers *et al.*, 1990) and system-generated synthetic knowledge, which augments intuitive human knowledge (Horváth, 2020b). Though not exclusively, it has effects on the methodology of designing smart products, systems, services, and experiences too. However, this variety of value manifestations is demanding and calls for a directed articulation. For instance, Loizou *et al.* (2019) brought up that traditional requirement engineering approaches may not be sufficient for creating a robust information platform for the conceptualization of smart systems and proposed co-design as an alternate. Others proposed the concepts of digital twins as an approach of lifetime information

aggregation in the case of connected designs (Tao *et al.*, 2019). Nevertheless, it has been recognized that the approaches proposed so far do not provide an integrated and comprehensive digital-twin approach to support the complete smart product lifecycle from the stages of requirements elicitation, product design, customization, and production monitoring (Boschert *et al.*, 2018).

A full-value methodology of smart designing should be built around and upon the recognition that smart design and smart systems are inseparable. In the language of mathematics, they have a bijective relationship, that is, one-to-one correspondence between the various elements of the two domains. It means that each smart system needs a dedicated smart design methodology, and each smart design methodology is tailored to a particular (family of) smart systems. There are no unpaired elements. But it implies that, most probably, there is no generic all-embracing smart design methodology. Having claimed this, it has to be mentioned that this does not exclude the possibility of abstracting a meta-methodology that represents a genotype-methodology from which many different phenotype-methodologies and eventually prototype-methodologies could be derived. Current research still has only a limited contribution to understanding and explanation of this issue. Our proposition is that a systematic methodology of smart design should have five pillars, as shown in Figure 4. Specifically, it should (i) be underpinned by a harmonized composition of fundamental theories, laws, and principles, (ii) have application context-dependent adaptable and sharable procedural scenarios and workflows, (iii) have a pool of application-independent and application-dependent conventional (manual), computational (digital), and intellect-driven (semantic) methods, (iv) exploit a related enabling technological infrastructure and intellectualized toolboxes, tools, and instrument, and (v) a set of consistent and self-decidable applicability and performance criteria.

Revisiting the issue of the above-mentioned bijective relationship, smart designing is the core process of creating smart systems, whereas smart systems provide the front and back ends to smart designing in that the environment states are acquired to trigger the smart designing process, and the design decisions will be executed by the smart system. Intellectualized systems are deemed to contribute to smart design as self-contained designing agents, which are able (i) to sense, model, reason, learn, and adapt according to their objectives, states, and environments; (ii) to help address complexity, heterogeneity, interoperation, communication, productivity, etc.; and (iii) to identify major conflicts in these and produce solutions to resolve the conflict. Our literature study explored that there are no comprehensive, tested, and practical underpinning theories documented in the literature yet. Notwithstanding, there are a few of incomprehensive, sketchy, and untested partial methodics and collections of methods proposed.

A fundamental question related to the methodology of smart design is that how much smart design can be independent of the specificities of the designed smart system? In the near future, smart designing mechanisms must be the core of a self-organizing smart system. With the absence of fully automatic smart designing algorithms, one can look into the design methodology/methods that are currently aiming at human designers and analyze how much dependence they have on human designers and how these dependences can be further automated? From the perspective of companies developing consumer durables, Schuh *et al.* (2019) proposed a strategic methodology for smartification, which does not extend to the technical issues of realization

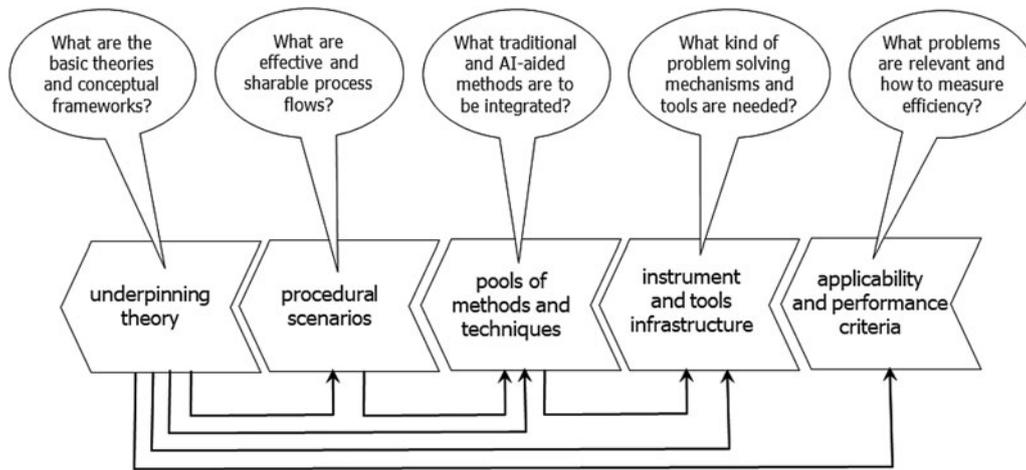


Fig. 4. Open or partially open questions related to a systematic methodology of smart design.

product-as-a-service or product-as-an-experience. If ANI (as well as AGI and AEI) plays a central role in the systematic methodology of smart design, then the primary issue is its role in theoretical underpinning, procedural execution, methodological support, instrument provisioning, and assessment. This was found rather under-elaborated. There are some progressive steps and approaches, for instance, in the field of electronics and software design, which are deemed to be application-constrained-specific smart design methodics. As arbitrary examples, the works of Tsukuda *et al.* (1993) and Lin *et al.* (2017) can be mentioned.

The methodology of artificial intelligence-driven smart design is variously and restrictively approached in the literature. Pessôa and Becker (2020) reviewed smart design engineering from the perspective of the 4th industrial revolution. He and Yang (2019) casted light on smart design as the issue of artificial intelligence-based design. Mattern (2018) interpreted it as calculative composition and addressed a number of related ethical issues. From the technological side, Tang (1997) proposed a knowledge-based architecture for intelligent design support. The co-creation aspect of smart design was addressed in the paper of McCormack *et al.* (2020), which dealt with real-time collaboration with creative artificial intelligence, and the paper of Fu and Zhou (2020), which focused on human and AI co-creation. Quanz *et al.* (2020) proposed a machine learning-based co-creative design framework. Various application opportunities of AI-based design methodology were studied. Fisher (1986) considered an AI-based methodology for factory design, while Chien and Morris (2014) discussed space application approaches of artificial intelligence. Oh *et al.* (2019) introduced the concept of deep generative design.

Part 2: Smart systems

Smartness of systems

In the literature, a “cognitive system” is seen as one that performs cognitive work via cognitive functions such as communicating, deciding, planning, and problem solving. The term “smart system” is not congruent with this definition. It emerged some 60 years ago and has gone through at least three metamorphoses. The first mentioning can be traced back to the very beginning of 1970s when the Texas Instruments company developed its first microprocessor. Twenty years later, the term was

reinterpreted when the Internet was realized and created the basis of semantic content repositories. In the mid of the first decade of this century, the concept of CPSs was introduced. Usually, they do not only rely on the computer network but are also equipped with reasoning capabilities, which are needed for human-supervised or automated smart problem solving. Some years ago, the concept of systelligence (self-managed system intelligence) emerged. It is supposed to make intellectualized engineering systems capable to sense, stream data, build awareness, infer and reason, monitor operation, plan self-adaptation, and enhance their performance as focused smart problem solvers (Horváth, 2020b). Thus, rapid technological advances may be one of the reasons why system smartness means a different thing for everyone dealing with it!

Bures *et al.* (2020) discussed that smart systems manifest as a heterogeneous, interconnected landscape of various applications of Internet of things, CPSs, and/or smart sensing systems. Furthermore, they saw a typical smart system application as the compositions of autonomous yet inherently cooperating components, including hardware units running upon specific networks and associated software components, achieving smartness by sensing and operation, both in an autonomous and in a collaborative manner. Components proactively sense the environment and provide their knowledge to other components to allow them to take smart and well-founded decisions. A typical conceptualization of a smart system is that it can (i) change its reasoning strategy and activate problem solving agents accordingly and (ii) learn new models to process changing and growing set of (sensor) input data or knowledge base contents. Their computing mechanisms are preprogrammed for doing this, though the needed adaptation and computational resources are determined at run-time. Systems adapt themselves within an anticipated envelope of changes. Smartness does not mean that all decisions are made by the reasoning mechanisms, but with the involvement of humans in the system operation loops (Schirner *et al.*, 2013). This can be done by mixed-initiative reasoning (shared decision making and action taking) (Dautenhahn, 1998).

Intellectualized engineered systems present (i) materiality, (ii) agentivity, (iii) intellectuality, (iv) purposiveness, and (v) transformativity. These all are needed for the realization of smartness from a functionality perspective. Behavioral smartness arises when intelligence meets the context. It implies that system

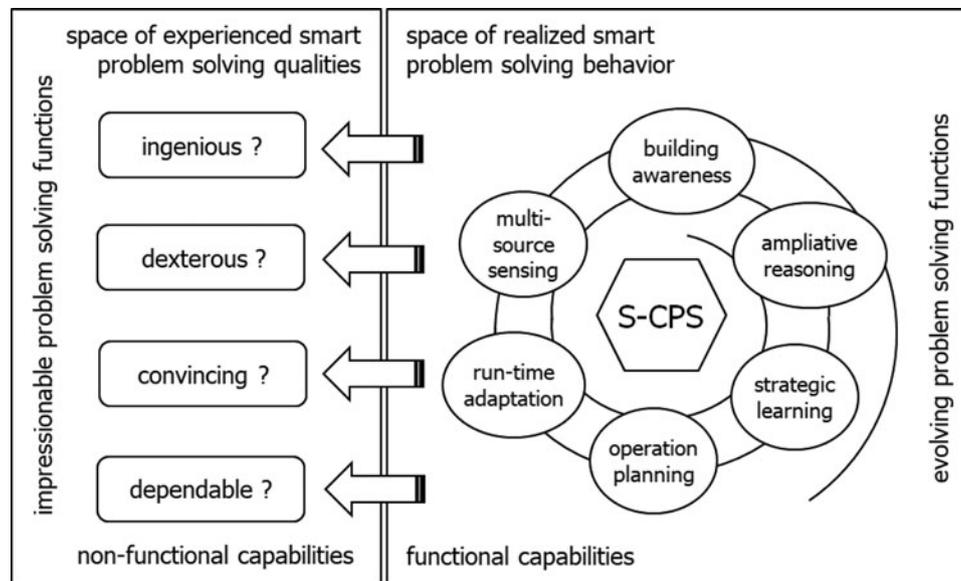


Fig. 5. Dual views on system smartness.

smartness is also a judgment from a nonfunctional (experiential) perspective. This judgment may come from the actors of the application environment, including humans and other systems. This duality is shown in Figure 5, which interprets system smartness as an evolving phenomenon. This is enabled by the train of evolving computational problem solving mechanisms and functions. A nonsubjective judgment of the experienced system's performance requires objective criteria and proper measures. These are not available in the literature yet. Nevertheless, based on the analogy of experiencing smartness in human problem solving, we regarded (i) ingenuity (inventiveness in the human context), (ii) dexterity (agility), (iii) convincingness (proficiency), and (iv) dependability (reliability) as observable nonfunctional characteristics in the context of impressive problem solving performance of smart CPSs (Horváth, 2020a). These characteristics interconnect the experienced quality of smart problem solving and sophistication of system functionalities, as well as the stakeholders of the system.

Ulsoy (2019) gave an explanatory example by viewing mechatronic systems as the representative of synergistic integration of mechanics, electronics, and computer science principles in their operation. The role of mechanisms is even more influential in the case of smart CPSs expected to implement complex and interdependent reasoning, learning, and adaptation processes (Tavčar and Horváth, 2018). Obviously, for this reason, their overall design is more challenging than designing their hardware, software, and cyberware components even in the application cases of moderate complexity. This is evidenced by many studies in the literature (Lieberman *et al.*, 2014; Huang, 2016; Mallikarjuna *et al.*, 2020).

Parallel with the technological and functional advancement, the holistic operational mechanisms of complex intellectualized engineered systems are getting bigger attention. Computation-based operation mechanisms are seen not only as abstract principles but also as features of the created reality that can be used as an implementation concept of complicated synergic (nonadditive) operations. This is line with Mario Bunge's ontological claim about the mechanisms of the experimented physical reality, which explains why it is doing and what it does (Bunge, 1997). This view regards mechanisms as the highest level functional

organization capacity of systems. From a practical perspective, a mechanism synergistically integrates operational principles. Implemented mechanisms lend themselves to central physical and computational processes in concrete systems. A particular dependable mechanism is inseparable from practical systems, since it integrates natural, technological, cognitive, temporal, and social dimensions. According to this mental model, smartness is an outcome of a successful and evidenced implementation of the underpinning mechanisms. There is a probability that this mechanism-oriented thinking becomes more widespread and influential in the context of intellectualized engineered systems. As suggested by Bunge (2004), the bottom line question is: what constructed mechanism makes a smart system purposefully working?

Many researchers think that a computational intelligence-assisted design framework is strongly needed for smart systems. Their operational and behavioral self-adaptation would need some sort of dedicated system intelligence (Ashby, 1947). In other words, the ability to extend the knowledge base and enhance the reasoning mechanisms would be a measure of the intelligence of systems. In a simplified form, the smartness of intellectualized engineering systems could be measured in terms of their potentiality to solve a range of challenging real-life application problems, while their intelligence could be measured in terms of their abilities to extend their knowledge household and problem solving mechanisms. In the language of system engineering, it is directly related to the innate self-adapting capabilities and possibilities (Sabatucci *et al.*, 2018). Adaptation can be based on external supervision and on update/upgrade agents, whereas self-adaptation assumes internal supervision and agents to establish a more beneficial *modus operandi*. It assumes, for instance, reflexive goal, situation, and state awareness, supervised and unsupervised learning, operation and performance planning, and functional, structural, and behavioral transformations.

Paradigmatic features of smart systems

What are the signatures of a smart system? This reads as a benign question, but it is not. The reason is that intellectualized engineered systems ontologically (paradigmatically) change over

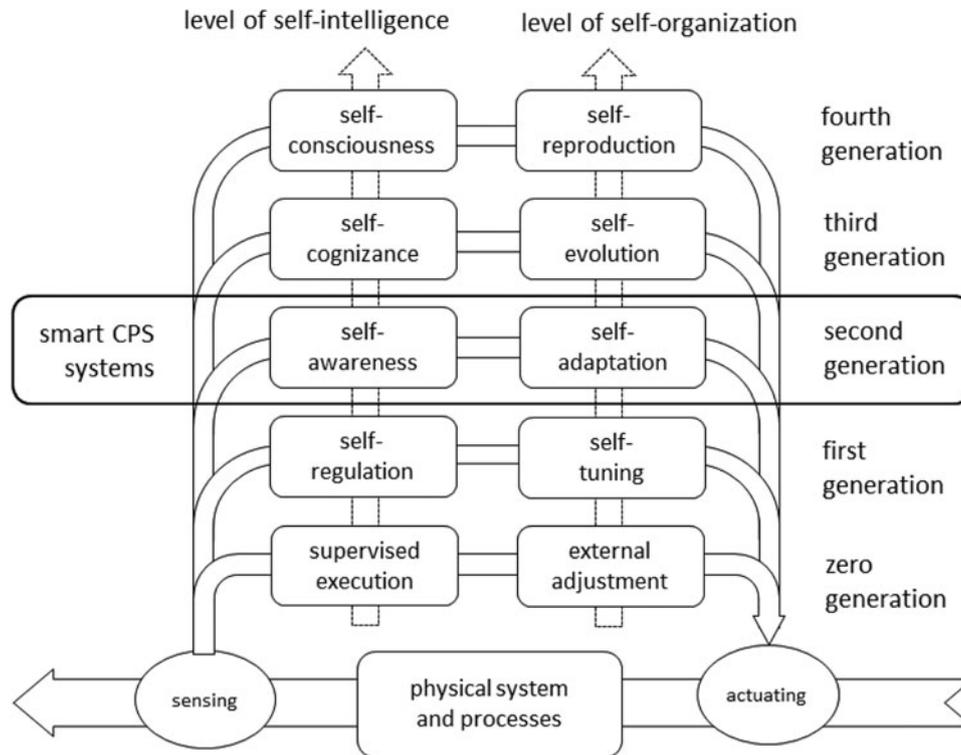


Fig. 6. Smart systems as a particular generation of cyber-physical systems.

time. This recognition lent itself to a reasoning model that, considering the continuous increase of the level of self-intelligence and the level of self-organization, identified five generations of systems in the context of CPSs (Horváth *et al.*, 2017). This model shown in Figure 6 interprets smart CPSs as second-generation systems and identifies self-awareness and self-adaptation as their distinguishing paradigmatic features. According to this model, an intelligent system is supposed to have system-level consciousness and should be able (i) to make (critical) decisions autonomously (without supervision or human intervention) based on (a) novel, (b) abstract, (c) uncertain, and/or (d) incomplete information; (ii) to create, propose, maintain, and devote values and perform value-based decisions that it has or other systems have created; (iii) to define new objectives, reprogram itself, acquire proper knowledge, and resolve its operational conflict even if only imperfect information is available; and (iv) to reproduce itself and survive in situations that were not foreseen at the initial implementation of the system and thus were not part of the original design intentions. Besides this model, various sets of distinguishing features and classifications have been proposed. As the aspects of classification, (i) implemented technological functions, (ii) services for application domains, and/or (iii) engineering performance characteristics have been considered.

Based on the overall engineering performance characteristics, (i) passive systems, (ii) reactive systems, (iii) active systems, and (vi) proactive systems have been distinguished. The model proposed by Schuh *et al.* (2019) arranged the digital features of products into eight categories according to (i) the type of data collection, (ii) the type of interaction, (iii) the place of product intelligence, (iv) the place of data retention, (v) the type of interconnectedness, (vi) the type of connectivity, (vii) the degree of product intelligence, and (viii) the degree of independence. Some publications claim that the key factors or distinguishing paradigmatic features of smart systems are (i) connectivity and

networking capabilities, (ii) operation under self-control or autonomously, (iii) context-sensitive interaction with users/devices, (iv) low-energy consumption and environment friendliness, (v) relying on cloud infrastructures and services, and (vi) using techniques of artificial intelligence. As most frequently identified ones in the literature, we propose (i) multi-level cooperative openness (Trokhimchuck, 2017), (ii) system-level reasoning and learning capabilities (Akbar *et al.*, 2017), (iii) system operation in dynamic contexts (Alegre *et al.*, 2016), (iv) semantic, pragmatic, and apobetic interaction (Jameson, 2007), (v) self-supervised planning and adaptation (Seilonen *et al.*, 2003), and (vi) ensuring multi-aspect dependability (Kamal Kaur *et al.*, 2018; Fig. 7).

The concept of multi-level cooperative open-ended systems has significance from the viewpoints of (i) organizing heterogeneous systems into a system of systems, (ii) the independent development of conceptually diverse subsystems, and (iii) facilitating continual incremental evolution (Anders *et al.*, 2016). Multi-level cooperative openness offers flexible interconnection and interoperation among all constituents that incidentally joining or leaving the system ensemble. Open systems are characterized by intrinsic incompleteness and decisional locality (Hewitt and De Jong, 1984) and imply the need for self-organization potentials (Gershenson *et al.*, 2018). The cooperative open-ended smart system should be able to ampliatively integrate diverse, multi-source, data streams (Saracco *et al.*, 1990). It means that they are supposed not only to semantically merge data streams but also to extract or synthesize additional intellect that is not conveyed in the original data streams. This creates an opportunity to dynamically manage the context information derived from multiple sources.

System-level reasoning (SLR) capabilities enable systems to make decisions similar to those of humans and manage

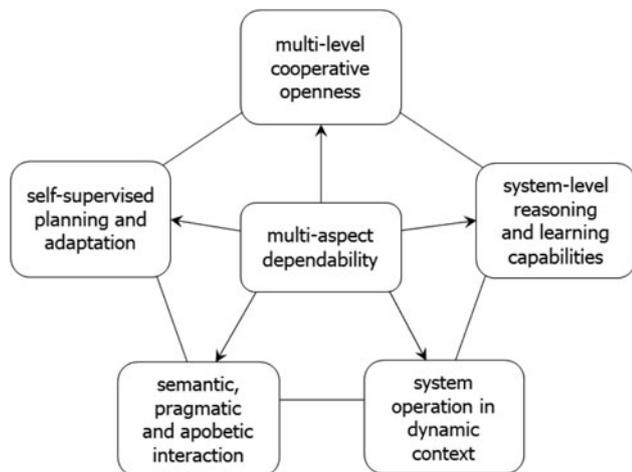


Fig. 7. Paradigmatic features of smart systems.

themselves or other linked systems. Two fundamental assumptions are that (i) no learning is possible without the application of prior domain knowledge and (ii) learning is possible without being explicitly programmed. Mathematical logic and ANI development have offered many “standard” reasoning mechanisms, which proved to suffer limitations when applied in specific problem solving contexts. Addressing real-life generic application problems (e.g., control of a self-driving car) needs multiple, inter-operating, task-specific problem solving mechanisms, instead of one monolithic one (Geng and Cassandras, 2011). This is deemed to be one of the most determining features of smart systems (Wu *et al.*, 2012). The principle of divide-and-conquer is applied to overcome developmental and application complexities and to increase reusability and adaptability. Most of the process-based reasoning mechanisms utilize cyber-physical intelligence and implement inductive inferencing. They may be deterministic (scenario-driven) and nondeterministic (knowledge driven). Typical examples for the former are the scenario-based causal decision-making mechanism proposed by Conrado and De Oude (2014) and the adaptive scenario-based reasoning mechanism of Cheng and Wang (2012). The latter is exemplified, for instance, by the semantic similarity-driven query intent discovery mechanism proposed by Fariha and Meliou (2019) and the procedural abduction mechanism synthesized for run-time adaptation by Horváth (2019). The computational elements of procedural abduction are shown in Figure 8.

Crowder *et al.* (2020) discussed the foundations of system-level thinking for artificial intelligent systems. Bijlsma *et al.* (2019) approached the issue of SLR from the perspective of the knowledge domain. Khan *et al.* (2014) discussed a typical example of advanced vehicle-level reasoning in an aircraft system. As discussed by Reed and Pease (2017), algorithmic reasoning mechanisms confront obstacles when they operate on ambiguous, conditional, contradictory, fragmented, inert, uncertain, or imperfect knowledge. Due to the recent trends of artificial intelligence research/development, system-level learning (SLL) has been synergistically interconnected with SLR. One example is deep learning that connects computational reasoning to nonpreprogrammed computational learning. The theory of computational SLL intends to explain and optimize (i) the inference principles of algorithmic and nonalgorithmic learning, (ii) the design and analysis of machine learning algorithms, and (iii) the sorts of

computationally learnable problems. Among others, Bayesian, supervised, unsupervised, deep, and adversarial learning strategies are applied. The optimization of the approaches is a concern. For instance, deep convolutional generative adversarial networks apply certain architectural (topological) constraints in unsupervised learning (Gao *et al.*, 2018). Fiser and Lengyel (2019) presented a probabilistic framework for perceptual and statistical learning. In the theoretical work of Kinouchi and Kato (2013), SLL activity was considered a primitive implementation of consciousness. Kinouchi and Mackin (2018) proposed an SLL consciousness model that modifies the configuration and states of a humanoid robot by self-action-decision functions toward autonomous adaptation. Kitagawa *et al.* (2018) investigated multi-stage learning in the context of robot application. Darling *et al.* (2016) introduced the concept of emergent learning as a framework for the whole-system strategy of learning and adaptation.

Building context awareness (Alegre *et al.*, 2016) and situation awareness are often mentioned functions not only of humans but also of self-regulating systems (Endsley, 2018). Dey *et al.* (2001) have defined the term context-awareness of systems as the capability of using the context to provide relevant information and/or services to the user, where relevance depends on the tasks of the users. Perera *et al.* (2013) argued that context awareness is an ingredient of the smartness of pervasive computing systems and proposed a comprehensive taxonomy of the context-information-related functionalities, which include (i) context acquisition, (ii) context modeling, (iii) context reasoning, (iv) context distribution, and (v) context processing functions. The idea of dynamic context inferring grew out from the concepts of context-aware computing (Li *et al.*, 2020) and context-aware applications (Koch *et al.*, 2019). The last years have witnessed the proliferation of context-aware recommender systems (Haruna *et al.*, 2017) and context-aware self-managing systems (Shishkov *et al.*, 2018). Measuring awareness is not only a technological but also a cognitive metrological problem due to its abstractness and the lack of reference (Endsley, 1995). Establishing model-based system self-awareness is a challenging information engineering task that spreads over time and cannot be reduced to elicitation and management of context information (Matthews *et al.*, 2001). It is made complicated by its many facets such as identity, goal, state, spatial, temporal, behavioral, context, and social awareness. They together have led to the issue of all-inclusive awareness and, eventually, to mimicked consciousness of smart systems (da Silva and Gudwin, 2010).

Apart and together, semantics, pragmatics, and apobetics play a key role not only in interpersonal communication and interaction but also in collaboration with smart systems (Horváth, 2012). The bottom line is achieving sufficient informing and successful execution (Cena *et al.*, 2019). From a design perspective, they work with different theories, criteria, principles, and approaches. Semantics, pragmatics, and apobetics consider the achievable objectives, the ways of achieving, and the implications and reflections, respectively (Horváth *et al.*, 2014). Semantics supports sharing meaning and understanding in mental (interpretative) and physical (manipulative) actions (Endert *et al.*, 2011), whereas pragmatics extends it with the concern about the success of achieving the intended or expected goals of the conducted actions. Apobetics concentrates on the relations between the way and the effects of how actions are made and on the implications caused by the results of actions on the stakeholders, as well as on their reflections. It investigates the quality of triggered cognitive and emotional reflections. Though the need for new methods of human

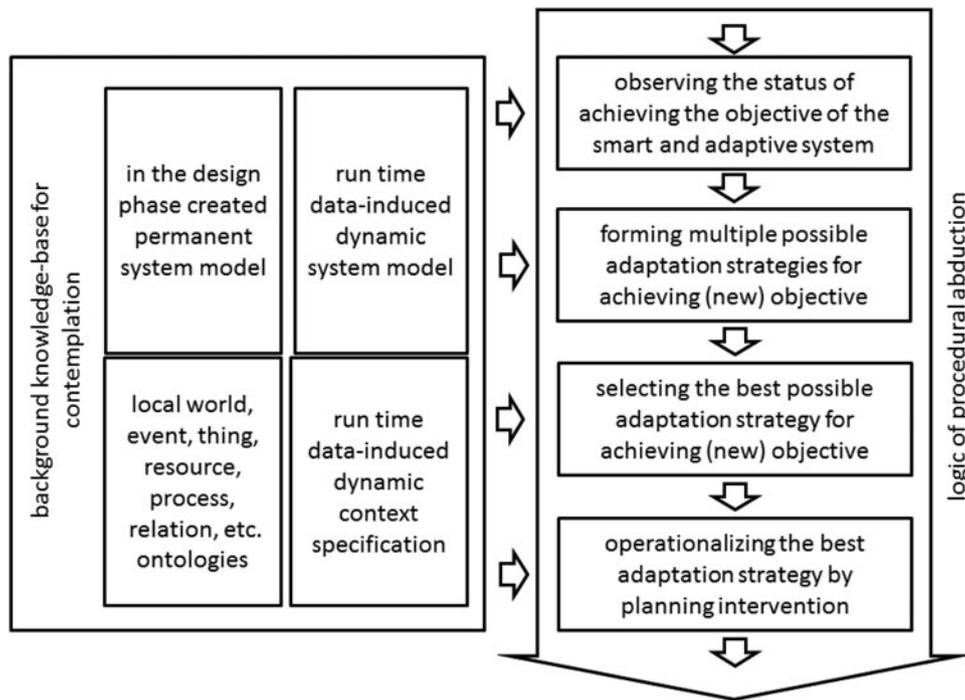


Fig. 8. The computational elements of procedural abduction concerning run-time adaptation.

interaction with smart systems and environments is widely recognized (Jameson, 2007), the progress is hindered by the lack of theories of apobetics. Computational sentience is almost neglected in the current literature of interaction research. As Mayer *et al.* (2014) posited, the interaction with smart systems (things) requires not only different interaction modalities and technological enablers but also a different mentality. Smartness opens up numerous new interaction possibilities in particular in the cognitive, perceptive, and the affective domains (Luyten and Coninx, 2005). System design should differentiate between the modes of executing actions, which can be (i) without any degree of freedom, (ii) with a limited degree of freedom, and (iii) with the maximum degree of freedom. Furthermore, it should take both the purpose of actions and the expected reflections into account (Bujnowski *et al.*, 2011). Apobetic-level investigations should consider these as problem solving constraints (Yang *et al.*, 2018).

Involving simultaneous and rapid changes in operational objectives, functionality, architecture, computation, interaction, and security, behavioral adaptation is a challenging paradigmatic feature of smart systems (Dobson *et al.*, 2019). Systems equipped with this ability have been variously called self-adaptive systems, self-managing systems, or self-organizing systems. Often self-healing systems and self-optimizing systems are also sorted in this category (Romero *et al.*, 2020). Sabatucci *et al.* (2018) proposed a meta-model that identifies four types of self-adaptive systems: (i) Type 1 (anticipating changes and possible reactions at design-time), (ii) Type 2 (equipped with alternative strategies for reacting to changes), (iii) Type 3 (aware of its objectives and operates with uncertain knowledge), and (iv) Type 4 (able of self-modifying its specification as biological systems do). To adapt themselves, smart systems need to use: (i) sensory perception (detecting and anticipating changes in the environment), (ii) cognition (reasoning about perceived changes and deciding on the best action), (iii) execution (controlling the implementation of cognitive decisions), and (iv) provisioning assurances (De

Lemos *et al.*, 2017). The major issue is that there is no general theory to explain self-adaptation in all contexts and there is no clear view on how to realize self-adaptation in a self-supervised manner at run-time (Weyns, 2019). Self-planning of adaptation is a complicated data-driven task that should consider not only the states of operations and the environmental changes but also the affordances of the system and the availability, inclusion, and exclusion of resources (Yamanobe *et al.*, 2017). Run-time planning of adaptation is supposed to happen in a proactive manner (Muccini and Vaidhyanathan, 2019). Reactive self-adaptation cannot avoid negative events and cannot derive better operation modes. Ideally, proactive self-adaptation may resolve these drawbacks, if it is able to detect the need for adaptation by online testing and define an adaptation plan in a narrow time window. However, current research cannot offer solutions for these yet. In the last years, the MAPE-K methods have been used successfully for the adaptation of software (da Silva *et al.*, 2020). Figure 9 shows the conceptual workflow of the proactive self-adaptation of CPSs. Currently, (i) no formal proofs of reaching good functional and architectural solutions are known and (ii) the behavior (operation under application circumstances) of a system cannot be validated without deploying it in a real environment. Many authors identified adaptation as a configurable interoperability problem and emphasized that self-management is inseparable from autonomic computing (Rutten *et al.*, 2017).

In the case of smart systems, the criteria of dependability appear in a more complicated form than in the case of nonintellectualized but mission-critical systems (Kamal Kaur *et al.*, 2018). In the conventional interpretation, dependability integrates such system attributes as availability, reliability, security, safety, integrity, survivability, and maintainability (Avizienis *et al.*, 2001). Mainly focusing on hardware and software dependability (Bernardi *et al.*, 2013), early works proposed redundancy as means of increasing their dependability and model-based analysis and simulation as useful methods (Sharvia *et al.*, 2016). In the

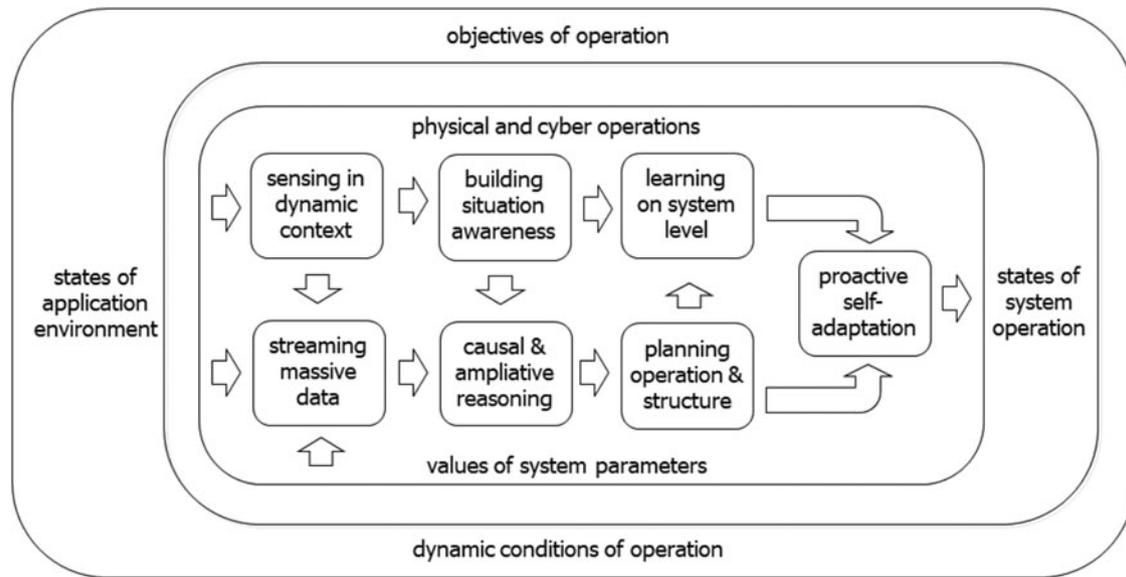


Fig. 9. Operational framework of proactively self-adaptive smart systems.

case of smart systems, dependability also concerns the dependability of reasoning mechanisms, system knowledge, and the decisions made, and entails the need for multi-concern intellect analysis and the adoption of novel certification schemes (Biggs *et al.*, 2011). It is assumed that intelligence provides more robustness as well as a comprehensive self-management of faults. The current research results still show an existing limit line at designing smart embedded systems for dependability (Srivastava and Singh, 2009). The issues related to the evaluation of the dependability of CPSs during the design period are recognized (Gheraibia *et al.*, 2019), but providing any generic solution is difficult due to the increasing aggregate complexity, the operational and environmental dynamics, and the consequences of self-adaptation (Sondermann-Wölke *et al.*, 2010). The dependability of complex smart systems is ontologically emergent and compositionality also plays a crucial role in it (Hartmann, 2014).

Part 3: Coupling of smart design and smart systems

Introducing the concept of connectors

Let us start from what has been discussed in the previous subsections of this paper. The question addressed in this subsection is: does AI create couplings between smart design and smart systems? And, if the answer is affirmative, then what creates what type of relationships? The above discussion of smart design and smart systems revealed that what kind of results of cognitive science, artificial intelligence, computing technologies, and cognitive engineering appear. There are several cognitive enablers that are utilized equally well in smart design and smart systems. The fact of the matter is that these cognitive enablers can facilitate the realization of the concept of partially self-designing smart systems. For this reason, they will be referred to as “connectors” in the rest of this paper. They have a special role in equipping smart systems with design functions and enhancing the methodology of smart designing. As an example of the latter, we may consider (i) helping the exploration of complex solution spaces and affordances, (ii) establishing extended cyber-physical-social environment, (iii) offering application problem-specific reasoning mechanisms, (iv)

playing the role of “big brother” in problem solving processes, (v) facilitating transdisciplinary concept synthesis approaches, and (vi) creating the basis for functional design automatons.

With some simplification, we can argue that paradigmatic features of smart systems are (i) multi-level cooperative openness, (ii) SLR and learning capabilities, (iii) system operation in dynamic contexts, (iv) semantic, pragmatic, and apobetic interaction, (v) self-supervised planning and adaptation, and (vi) ensuring multi-aspect dependability. The realization of these system features requires the use of AI connectors in the smart design process. Not considering the forerunning activities (fuzzy front-end) and the successive activities (back-end) of the system design process, a smart design process involves (i) functional, (ii) architectural, (iii) hardware, (iv) software, (v) cyberware, (vi) cognitive, (vii) workflow, (viii) interface, (ix) production, and (x) installation design activities. The artificial intelligence-based connectors can establish M to N enabling the relationships between the features of smart systems and the activities of system design. They may facilitate the process of smart designing, but they can also be embedded in smart systems as operation enablers. This explains how AI-enablers serves as connectors. It is visualized in Figure 10.

Primary types of connectors

Intuitively, the AI-based connectors can be sorted into three categories: (i) conceptual (platforms, frameworks, protocols, and experience), (ii) functional (models, mechanisms, and knowledge), and (iii) instrumental (environments, tools, and methods). The connectors in the conceptual category support the blue-printing of smart systems and the cognitive engineering of smartness, while those listed in the functional category support the realization of functionalities. The connectors in the instrumental category are the external enablers of the cognitive design of systems. These will be discussed below. Note that new connectors and/or categories may need to be considered as additional results of artificial intelligence research emerge.

AI-platforms are predesigned modular technological architectures, composed of a core and a periphery, for the seamless integration of cognitive system resources with the potential to easily

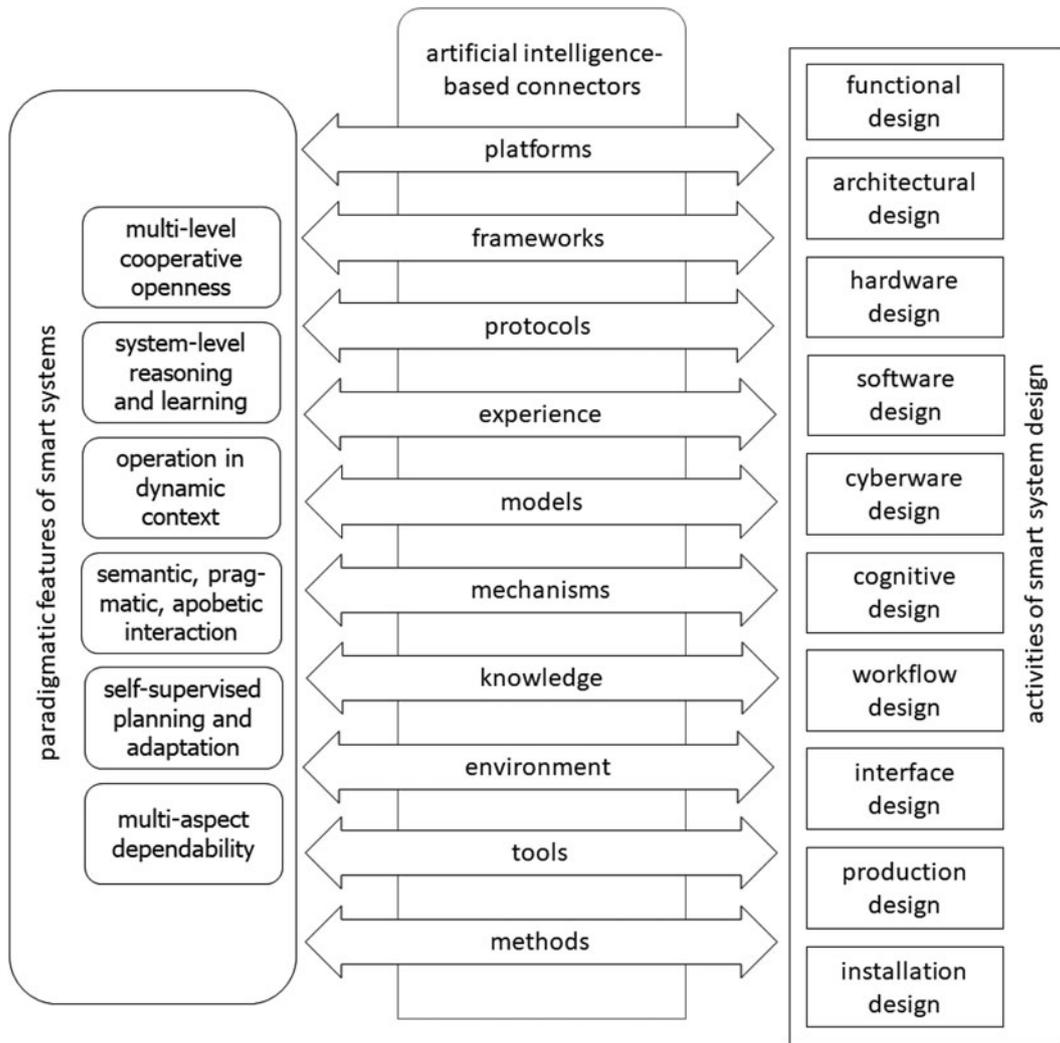


Fig. 10. Categories of AI-connectors between paradigmatic system features and smart system design.

plugin as many hardware, software, and cyberware components as possible or needed (Mucha and Seppala, 2020). They provide most of the interfaces that are needed for their interoperation of components but also allow offer a straightforward approach to customization for purpose. AI-platforms are designed to help connect and integrate components not only physically but also from workflow integration and information sharing points of view (Epstein *et al.*, 2018). As templates, they support building multiple smart application systems within the same functional and technological framework and by utilizing cloud services. Typical representatives are such as (i) Algorithmia, (ii) DeepMind, (iii) CloudCV, (iv) FairML, (v) PsychLab, (vi) OpenML, (vii) Themis-ML, (viii) ParlAI, and (ix) TuringBox. Different AI-platforms provide different opportunities and restrictions. Customized add-on and plug-in components are used to complement the standard functionality provided by some platforms. Therefore, they can be seen both as a constraint on the intellect development process and as a facilitator of tailoring problem solvers. The advantage of using AI-platforms is that application systems can be developed faster and cheaper than when they are built standalone (Venkataramani *et al.*, 2020).

AI-frameworks are the conceptual constructs of the cognitive parts of smart systems including logical, functional, architectural,

computational, and interaction aspects. Typically, they are extracted, abstracted, or constructed based on implemented smart systems or parts thereof (Torres and Penman, 2020). In general, they allow for the easier and faster creation of applications by purposefully arranging and interrelating operational concepts. Cena *et al.* (2019) sketched up a framework for incorporating multi-dimensional intelligence in smart physical objects. The generic functionality offered by AI-frameworks can be selectively changed by additional, purposely developed constituents, thus providing application-specific features and services. Using an AI-framework supports intellectual effectiveness, consideration of the requirements, as well as the needed functionality, its feasibility, and the decision on system-level features. In addition, an AI-framework captures the relationships of the cognitive elements and facilitates their analysis. Opposing formal quantitative models, which provide a theoretical explanation, conceptual frameworks provide insights and understanding. There are also different interpretations of AI-frameworks. For instance, Zysman and Nitzberg (2020) proposed a framework for discussing the limits, possibilities, and risks of AI.

AI-protocols are constructed to support the organization of system-internal cognitive workflows or system-external interaction and supervision workflows (Kesavan *et al.*, 2008). As typical

in computer science, protocols include a standardized set of rules for preparation, processing, and communicating data, instructions, commands, activities, constraints, acknowledgements, etc. for cognitive problem solving. AI-protocols also enable the collaboration and networking software agents and the proper scaling of artificial intelligence lifecycle on demand (Kuwabara *et al.*, 1995). AI-protocols are application-specific and propagate different methods of scenario development or process organization. A current concern is ontological modeling of AI-protocols (Zhou *et al.*, 2006), and the development of scalable networking and security protocols (Shu and Lee, 2007).

AI-experience represents the tacit knowledge of designing cognitive capabilities (Simon, 1986). It is often called the know-how of artificial intelligence. The subjects can be varied, ranging from insights in efficient problem solving approaches, through deploying AI-models and best practices in a given context, to the limitations and affordances of AI-tools. The development of repositories and warehouses for aggregation and availing AI-experience is challenging due to intangibility and abstractness of knowledge and subjectivity of experiences. It is also not clarified how to convert experiential know how into teachable and learnable design principles (Liao *et al.*, 2020). Smith (2019) discussed the paradox of being flooded by information about the all-mightiness of artificial intelligence as well as the obvious dreads and lasting uncertainties. While positive experience is seen as a success factor of adopting AI in design, Chen *et al.* (2020) reported on the lack of knowledge about the success factors of AI adoption in the telecommunication industry.

AI-models cognitively represent some real-world object or phenomenon as a set of logical arrangement, mathematical equations, taxonomical relationships, and computational concepts (Rajae and Jafari, 2020). In general, AI-models are generated in three stages, including (i) model generation, (ii) model interpretation, and (iii) model validation. Two subcategories can be identified: (i) explicit models and (ii) implicit models. Explicit models rely on some descriptive or explanatory theories, are preprogrammed based on algorithms, and are represented using computational languages. Examples of explicit AI-models are decision trees, parameterized simulation models, support vector machines, ontology structures, taxonomical constructs, and probabilistic schemas (Hu *et al.*, 2019). Implicit models are pattern-type constructs for which no explicit algorithm is preprogrammed. These are typical in machine and deep learning, where mathematical algorithms are trained to generate models using data and human expert input. They attempt to replicate specific decision processes and replicate decisions that (a team of) experts would make if they could review all available data when the same information is provided. It is expected that implicit models reveal the rationale behind the pattern and decision to help interpret the decision process (Gade *et al.*, 2019). This stimulates research in domain-specific explainable artificial intelligence (Jia *et al.*, 2020).

AI-mechanisms are physical, software, and/or cyberware entities and related computational activities that produce certain problem solving behavior (Ojo *et al.*, 2019). The idea of mechanism is a central part of the concept of smart systems, which may include multiple various nonampliative (NARMs) and ampliative reasoning mechanisms (ARMs). NARMs are such as (i) classification, (ii) searching/looking up, and (iii) contextualization. ARMs are such as (i) fusion, (ii) inferring, (iii) reasoning, (iv) abstraction, (v) learning, (vi) decision making, and (vi) adaptation (of knowledge). They can be application-neutral and application-specific. Application-neutral ARMs are needed for

intelligent and creative reasoning in intellect-intensive applications, which could not be performed by mathematical logic or (i) inductive, (ii) deductive, (iii) abductive, and (iv) retrospective reasoning, or any combination of them. Historically, five major families of ARMs have been developed, such as (i) symbolic, (ii) analogical, (iii) probabilistic, (iv) evolutionist, and (v) connectionist. Their interoperation is restricted by large differences in representational syntaxes and computational approaches (Varshney *et al.*, 2019). A current issue is designing awareness, inferring/reasoning, and adaptation mechanisms toward an optimal problem solving potential. Artificial neural network architectures are the most widespread representatives of AI-mechanisms, producing nontransparent implicit models (Seidel *et al.*, 2018b). Two main targets for current research are (i) dynamic ANN model training and (ii) dynamic architecture generation (layer and node addition or removal).

AI-knowledge primarily means problem solving knowledge, rather than system development knowledge (Horváth, 2020b). The two main constituents of AI-knowledge are (i) codified human knowledge and (ii) self-generated illative knowledge. Accordingly, AI-knowledge is partly generated by knowledge engineering of human knowledge in development time and partly by the AI inferring, reasoning, and learning mechanisms run-time (Feng *et al.*, 2021). Knowledge engineering includes the codification (aggregation, structuring, representation, and validation) of knowledge (AlGhanem *et al.*, 2020). The reasoning mechanisms of a system process codified human knowledge and append it with synthetic knowledge patterns that are not part, but derivatives of codified knowledge. Thus, AI-knowledge can be explicit (explainable) and implicit (unexplainable). Explainable knowledge is conclusions derived based on the results of numerical or symbolic computations by a system, and not explainable knowledge is the abstract patterns constructed by machine learning algorithms (Zatsman, 2020). AI-knowledge is of extreme heterogeneity not only with respect to its cognitive contents but also to its representation, storage, and processing (Kasabov, 2019). A recognized issue is the verification and validation of AI-knowledge in varying application contexts. The machine readability of system knowledge has become one of the recent targets (Bauguess, 2018).

AI-environments are combined hardware, software, and cyberware utilities that allow smart system development, though they themselves are not necessarily smart (Malik and Singh, 2020). Therefore, they are seen as integrated tool complexes and often referred to as integrated development toolboxes, if they are extended with resource selection and recommendation functions. Among others, they manage source codes, component libraries, and standard components. Knowledge ontologies are included or linked to AI-environments. Recently, environments have been specialized to particular AI tasks such as deep learning, image processing or speech generation, and optimized for performance (Hechler *et al.*, 2020). Among many others, the commercialized representatives of AI-environments are (in alphabetical order): (i) AI Platform (Google), (ii) Azure (Microsoft), (iii) Dialogflow (Google), (iv) Holmes AIA (Wipro), (v) MindMeld (Cisco), (vi) Nia (Infosys), (vii) Rainbird (Rainbird Technologies), (viii) Symphony AyasdiAI (Ayasdi), (ix) Tensorflow (Google), and (x) Watson Studio (IBM). These environments offer a wide range of cognitive functions that the human mind uses to perform problem solving, learning, reasoning, motion, manipulation, perception, speech, vision, cooperation, and behavior. AI-environments make it easier to move from the ideas through implementation to

deployment faster and more cost-effectively in a humane manner (Crowley *et al.*, 2019).

AI-tools have been developed for handling a particular problem with a proper set of computational functions. As Pichai (2018) argued, AI tools have the potential to unlock new realms of scientific research and knowledge in critical domains like biology, chemistry, medicine, and environmental sciences. Thus, the arsenal of AI tools is immense (Bawack *et al.*, 2019). They can be sorted into five general categories: (i) sensing tools (for computer vision, biometrics analysis, health diagnoses, speech recognition, space navigation, etc.) (ii) understanding (for language interpretation, document extraction, automated translation, text analysis, pattern recognition, etc.), (iii) manipulation (logical inferring, decision making, process planning, agent development, robot control, collaboration management, contextual recommendation, etc.), (iv) knowledge engineering (for semantic merging, ontology specification, semantic merging, automated verification, context processing, etc.), (v) problem solving (for task decomposition, scenario-driven reasoning, artifact classification, solution space exploration, creative composition, etc.), and computational learning (for situation probmodeling, genetic evolution, machine learning, deep learning, natural mimicry, etc.) (Minton, 2017). AI-tools are already used in knowledge-intensive design, complementing cognitive capabilities of designers (Karan and Asadi, 2019). Altavilla and Blanco (2020) posited that using AI-tools can reach the automation level where the tool alone generates or selects the final design outcome and presents the result to the stakeholders at the end of the process.

AI-methods are contemplated as implementation enablers, rather than the principles of operations of smart systems. They provide principles for the effective utilization of artificial intelligence enablers in a context-sensitive manner as well as for the organization of applications. Agre (1997) argued that, in the first 15 years, AI researchers developed a series of technical methods that provide interesting, technically precise accounts of a wide range of human phenomena and cognitive tasks. A characteristic set of methods has been dedicated to algorithmic compositions (Papadopoulos and Wiggins, 1999). AI-methods imply novel design practices. Seidel *et al.* (2018a) gave an example by investigating a triple-loop model of design activities that is entailed by the application of autonomous AI-tools. Among the road pavers, Haase (1990) discussed that how AI-methods can be used in real-time software products, while Newman *et al.* (2020) presented a systematic approach to using AI-methods in civilian applications and education. Begler and Gavrilova (2018) reviewed AI-methods for knowledge management systems.

The strength of the interrelationship created by a particular connector determines the applicable design strategy. If the interrelationships among the connectors are zero (or weak), then a traditional sequential design approach can be applied. If the relationships are strong, then a co-design approach is to be applied. The measures of interrelationships vary in every application case.

Part 4: Reflections, conclusions, and future research

Reflections

The concepts of smart design and smart systems are getting more and more attention in research, development, and education. Both of them intends to exploit the recent results of artificial intelligence research, no matter if problem solving methods, intellectualized tools, or application-specific knowledge processing are

concerned. Apart from this commodity, they also have an intricate mutual relationship as enablers. On the one hand, tailored to the innovation of smart systems, smart design can change the traditional methodologies of systems engineering and make it more synergetic, efficient, and reliable. On the other hand, smart systems can be used as empowering resources of smart design that not only extend the cognitive space of designing but also offer new affordances. Ultimately, a part of design can be delegated to self-supervised, self-adaptive, smart systems in the near future. The current trends are pointing toward this end, though there are still many known and unknown technological issues and obvious knowledge deficits.

This article has made an attempt to contribute to answering some of the common issues. The intention could not be else by casting light on a possible interpretation and approach, without enforcing strict definitions and other formal specification. Recognizing the fact that research in the contexts of the manifestation and interrelationship of smart design and smart systems is still in an early stage, the content discussed in the paper must be seen as possible ingredients of a conceptual framework. It has been concluded that, toward a comprehensive theory and methodology development, integration and abstraction of the knowledge conveyed by the individual research efforts is needed on a short notice. Furthermore, due to the transdisciplinary nature of the related research phenomenon, experts of the related disciplines (cognitive science, system theory, advance computation, system engineering, artificial intelligence, knowledge engineering, and so forth) need to collaborate and formulate not mono-disciplinary research questions. These are deemed indispensable, but also instrumental, to answering the questions related to their very nature, functionality, implementation, utilization, and impacts of smart designing of smart systems and employing smart systems in smart design.

Some propositions

What the reader may know or do differently in the light of the above (incomplete) literature analysis and critical systems thinking driven argumentation? Though the lack of undisputable definitions and exhausting explanations is obvious, several propositions can be made. They are as follows:

- (a) Smart design is a viable concept in the age of intelligence revolution, since it can provide significant cognitive support to designers to cope with complexities, heterogeneities, compositionality, affordances, and dependability of smart systems.
- (b) Smart design should not be seen as axiomatization-based automated design by specialized systems. It is based on an extensive cognitive and creative interaction between humans and systems.
- (c) Considering the premature stage of development/evolution, smart design raises many more issues than it can address and solve, but it is rapidly gaining potential as the literature reflects it.
- (d) It can be prognosticated without a larger risk that smart design and smart systems will become inseparable in the near future.
- (e) Self-supervised (or only partially human-supervised) runtime self-design of smart systems is a realistic idea, though more knowledge is needed about the theoretical fundamentals and practical implementation of self-adaption of complex is and will be needed.

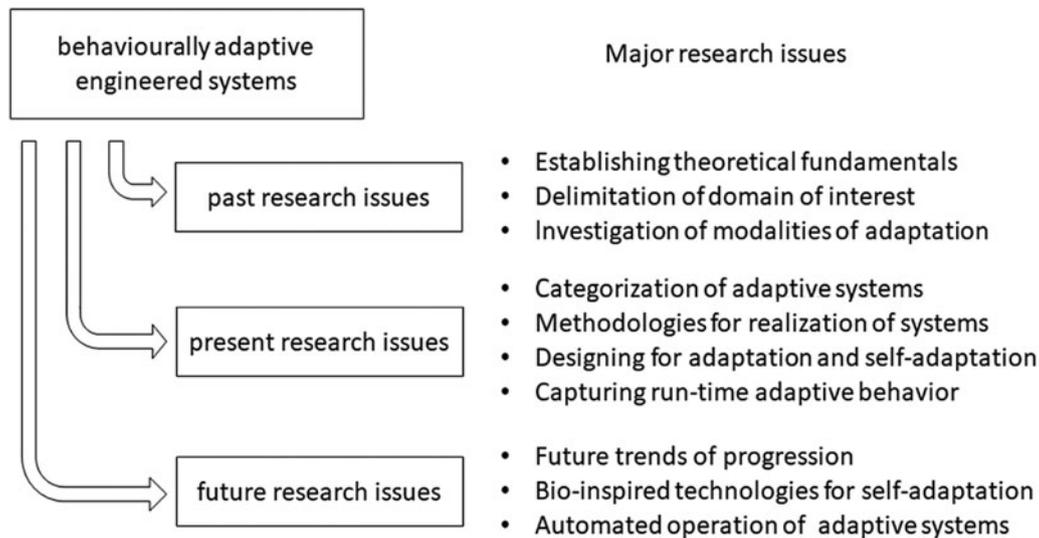


Fig. 11. Major research issues concerning self-supervised self-adaptive smart systems.

- (f) A theory of smart systems is supposed to provide a unified set of propositions made with the aim of achieving some form of understanding that provides an explanatory power and predictive ability.
- (g) Application dependence of smart systems and measuring their performance in various application contexts need further in-depth studies.
- (h) It seems that a proper realization of self-adaptation cannot be separated from the assessment of the goals, state monitoring, observing the environment, building awareness, SLR and SLL, and proactive planning.
- (i) Self-adaptation plans should be verified before execution and the outcome of adaptation should be validated run-time without suspending system operation.
- (j) It is not enough for a smart system to perform smart problem solving operation, but it should also raise the impression that its behavior and the solution are smart.

Future research opportunities

Since smart design and smart systems are in an early stage, an extremely large number of phenomena and related issues need to be studied. Figure 11 shows the major research issues in the domain of self-adaptive smart systems. However, research should extend not only to the technological and cognitive domains but also to human, social, business, and visionary domains. Instead of going into technical details concerning manifestations, causalities, implications, dependences, affordances, constraints, etc., we propose the following for consideration.

- (1) Systematic blending of the specific bodies and chunks of knowledge (including the foundational theories) available related to smart design, smart systems, and smart exploitation.
- (2) Development of strategic roadmaps that consider both the digital transformation and the proliferation of intellectualization with regards to changing human roles and system affordances and that can be used as templates by both the academia and the industry.
- (3) Moving toward transdisciplinary research and development activities that synthesize and amplify the knowledge,

- methods, competences, and experiences of the stakeholders of smart design and smart systems.
- (4) Fully fledged manifestation of the concept of computational mechanisms may lead to the situation when intellectualized engineering systems are built from self-adaptive modules of general or application-specific computational mechanisms, rather than from discrete components, fulfilling not only composability but also compositionality specifications and principles.

References

- Abramovici M** (2014) Smart products. In Chatti S, Laperrière L, Reinhart G and Tolio T (eds), *CIRP Encyclopedia of Production Engineering*, 2nd ed. Berlin-Heidelberg: The International Academy for Product Engineering, Springer, pp. 1–5.
- Abramovici M, Göbel JC and Savarino P** (2016) Virtual twins as integrative components of smart products. *Proceedings of the IFIP International Conference on Product Lifecycle Management*. Cham: Springer, pp. 217–226.
- Adams KM** (2012) Systems theory: a formal construct for understanding systems. *International Journal of System of Systems Engineering* 3, 209–224.
- Adams KM, Hester PT, Bradley JM, Meyers TJ and Keating CB** (2014) Systems theory as the foundation for understanding systems. *Systems Engineering* 17, 112–123.
- Agre PE** (1997) Toward a critical technical practice: lessons learned in trying to reform AI. In Agre PE, Bowker G, Gasser L, Star L and Turner B (eds), *Bridging the Great Divide: Social Science, Technical Systems, and Cooperative Work*. Hillsdale, NJ: Lawrence Erlbaum Associates, Inc., pp. 1–17.
- Akbar A, Khan A, Carrez F and Moessner K** (2017) Predictive analytics for complex IoT data streams. *IEEE Internet of Things Journal* 4, 1571–1582.
- Akinsolu MO, Danjuma IM, Mistry KK, Liu B, Abd-Alhameed RA, Lazaridis PI and Excell P** (2019) Efficient AI-driven design of microwave antennas using PSADEA. *Proceedings of the 2nd IEEE Middle East and North Africa Communications Conference*. IEEE, Manama, Bahrain, pp. 1–5.
- Alegre U, Augusto JC and Clark T** (2016) Engineering context-aware systems and applications: a survey. *Journal of Systems and Software* 117, 55–83.
- AlGhanem H, Shanaa M, Salloum S and Shaalan K** (2020) The role of KM in enhancing AI algorithms and systems. *Advances in Science, Technology and Engineering Systems Journal* 5, 388–396.
- Alippi C and Ozawa S** (2019) Computational intelligence in the time of cyber-physical systems and the Internet of Things. In Kozma R, Alippi C, Choe Y and Morabito FC (eds), *Artificial Intelligence in the Age of Neural Networks and Brain Computing*. Cambridge, MA: Academic Press, pp. 245–263.

- Altavilla S and Blanco E** (2020) Are AI tools going to be the new designers? A taxonomy for measuring the level of automation of design activities. *Proceedings of the Design Society: DESIGN Conference*, Vol. 1. Cambridge University Press, pp. 81–90.
- Anders G, Siefert F, Schiendorfer A, Seebach H, Steghöfer JP, Eberhardinger B and Reif W** (2016) Specification and design of trust-based open self-organising systems. In Reif W, Anders G, Seebach H, Steghöfer J-P, André E, Hähner J, Müller-Schloer C and Ungerer T (eds), *Trustworthy Open Self-Organising Systems*. Cham: Birkhäuser, pp. 17–54.
- Ashby WR** (1947) Principles of the self-organizing dynamic system. *Journal of General Psychology* 37, 125–128.
- Avizienis A, Laprie JC and Randell B** (2001) Fundamental concepts of computer system dependability. *Proceedings of the Workshop on Robot Dependability: Technological Challenge of Dependable Robots in Human Environments*. Citeseer, pp. 1–16.
- Bauguess SW** (2018) The role of machine readability in an AI world. *SEC Keynote Address: Financial Information Management Conference*, pp. 1–6.
- Bawack R, Wamba SF and Carillo K** (2019) Where information systems research meets artificial intelligence practice: towards the development of an AI capability framework. *Technology* 12, 15–2019.
- Begler A and Gavrilova T** (2018) Artificial intelligence methods for knowledge management systems. Working Paper No. 15106. Moscow: Saint Petersburg State University, p. 1.
- Bello O and Zeadally S** (2019) Toward efficient smartification of the Internet of Things (IoT) services. *Future Generation Computer Systems* 92, 663–673.
- Bernardi S, Merseguer J and Petriu DC** (2013) Dependability analysis techniques. In Bernardi S, Merseguer J and Petriu DC (eds), *Model-Driven Dependability Assessment of Software Systems*. Berlin, Heidelberg: Springer, pp. 73–90.
- Biehl S** (2017) *Design Guidelines for Smart Services: A Strategic-Logic Perspective on Seeking Competitive Advantage with Digitized Servitization Strategies* (Doctoral dissertation). University of St. Gallen, p. 1.
- Biggs G, Nakabo Y, Kotoku T and Ohba K** (2011) On the development of dependable intelligent systems. *Advanced Robotics and Its Social Impacts*. IEEE, pp. 16–19.
- Bijlsma T, Suermondt WT and Doornbos R** (2019) A knowledge domain structure to enable system wide reasoning and decision making. *Procedia Computer Science* 153, 285–293.
- Bonner JVH** (1999) Implications for using intelligence in consumer products. In Green WS and Jordan PW (eds), *Human Factors in Product Design*. London: Taylor & Francis, pp. 56–63.
- Boschert S, Heinrich C and Rosen R** (2018) Next generation digital twin. *Proceedings of the International Tools and Methods of Competitive Engineering Symposium*. Spain: Las Palmas de Gran Canaria, pp. 209–217.
- Bucklin R, Lehmann D and Little J** (1998) From decision support to decision automation: a 2020 vision. *Marketing Letters* 9, 235–246.
- Bujnowski A, Palinski A and Wtorek J** (2011) An intelligent bathroom. *Proceedings of the Federated Conference on Computer Science and Information Systems*. IEEE, pp. 381–386.
- Bunge M** (1997) Mechanism and explanation. *Philosophy of the Social Sciences* 27, 410–465.
- Bunge M** (2004) How does it work? The search for explanatory mechanisms. *Philosophy of the Social Sciences* 34, 182–210.
- Bures T, Gerostathopoulos I, Hnetyka P, Plasil F, Krijt F, Vinarek J and Kofron J** (2020) A language and framework for dynamic component ensembles in smart systems. *International Journal on Software Tools for Technology Transfer* 22, 1–13.
- Cena F, Console L, Matassa A and Torre I** (2019) Multi-dimensional intelligence in smart physical objects. *Information Systems Frontiers* 21, 383–404.
- Chen H, Li L and Chen Y** (2021) Explore success factors that impact artificial intelligence adoption on telecom industry in China. *Journal of Management Analytics*, 8, 1–33.
- Cheng ST and Wang CH** (2012) An adaptive scenario-based reasoning system across smart houses. *Wireless Personal Communications* 64, 287–304.
- Chien S and Morris R** (2014) Space applications of artificial intelligence. *AI Magazine* 35, 3–6.
- Chowdhury S, Haftor D and Pashkevich N** (2018) Smart product-service systems (smart PSS) in industrial firms: a literature review. *Procedia CIRP* 73, 26–31.
- Conrado C and De Oude P** (2014) Scenario-based reasoning and probabilistic models for decision support. *Proceedings of the 17th International Conference on Information Fusion*. IEEE, pp. 1–9.
- Crowder JA, Carbone J and Friess S** (2020) Systems-level thinking for artificial intelligent systems. In *Artificial Psychology*. The Steering Committee of The World Congress in Computer Science, Computer Engineering and Applied Computing (WorldComp). Cham: Springer, pp. 15–27.
- Crowley J, O'Sullivan AP, Nowak A, Jonker C, Pedreschi D, Giannotti F and Rogers Y** (2019) *Toward AI Systems That Augment and Empower Humans by Understanding Us, Our Society and the World Around Us*. Project Report, pp. 1–32.
- Dai W, Vyatkin V, Chen C and Guan X** (2015) Modeling distributed automation systems in cyber-physical view. *Proceedings of the IEEE 10th Conference on Industrial Electronics and Applications*. IEEE, pp. 984–989.
- Darling M, Guber H, Smith J and Stiles J** (2016) Emergent learning: a framework for whole-system strategy, learning, and adaptation. *The Foundation Review* 8.
- da Silva RC and Gudwin RR** (2010) A conscious-based mind for an artificial creature. *ALIFE* 2010, 616–623.
- da Silva AE, Andrade AM and Andrade SS** (2020) Self-adaptive systems planning with model checking using MAPE-K. *Proceedings of the XXI Workshop on Testing and Fault Tolerance*. SBC, pp. 69–82.
- Dautenhahn K** (1998) The art of designing socially intelligent agents: science, fiction, and the human in the loop. *Applied Artificial Intelligence* 12, 573–617.
- De Lemos R, Garlan D, Ghezzi C, Giese H, Andersson J, Litoiu M and Zambonelli F** (2017) Software engineering for self-adaptive systems: research challenges in the provision of assurances. *Software Engineering for Self-Adaptive Systems III. Assurances*. Cham: Springer, pp. 3–30.
- Dey AK, Abowd GD and Salber D** (2001) A conceptual framework and a toolkit for supporting the rapid prototyping of context-aware applications. *Human-Computer Interaction* 16, 97–166.
- Dobson S, Hutchison D, Mauthe A, Schaeffer-Filho A, Smith P and Sterbenz JP** (2019) Self-organization and resilience for networked systems: design principles and open research issues. *Proceedings of the IEEE* 107, 819–834.
- Erdert A, Fiaux P and North C** (2011) Unifying the sensemaking loop with semantic interaction. *Proceedings of the IEEE Workshop on Interactive Visual Text Analytics for Decision Making at VisWeek*, pp. 1–4.
- Endsley MR** (1995) Measurement of situation awareness in dynamic systems. *Human Factors* 37, 65–84.
- Endsley MR** (2018) Automation and situation awareness. In Parasuraman R and Mouloua M, (eds), *Automation and Human Performance*. Milton Park: Routledge, pp. 163–181.
- Epstein Z, Payne BH, Shen JH, Dubey A, Felbo B, Groh M and Rahwan I** (2018) Closing the AI knowledge gap. *arXiv preprint arXiv:1803.07233*.
- Fariha A and Meliou A** (2019) Example-driven query intent discovery: abductive reasoning using semantic similarity. *Proceedings of the VLDB Endowment* 12, 1262–1275.
- Feng Z, Mayer W, He K, Kwashie S, Stumptner M, Grossmann G and Huang W** (2021) A schema-driven synthetic knowledge graph generation approach with extended graph differential dependencies. *IEEE Access* 9, 5609–5639.
- Filho FM, Liao Y, Loures ER and Junior OC** (2017) Self-aware smart products: systematic literature review, conceptual design and prototype implementation. *Procedia Manufacturing* 11, 1471–1480.
- Fiser J and Lengyel G** (2019) A common probabilistic framework for perceptual and statistical learning. *Current Opinion in Neurobiology* 58, 218–228.
- Fisher EL** (1986) An AI-based methodology for factory design. *AI Magazine* 7, 72
- Fu Z and Zhou Y** (2020) Research on human-AI co-creation based on reflective design practice. *CCF Transactions on Pervasive Computing and Interaction* 2, 33–41.
- Gade K, Geyik SC, Kenthapadi K, Mithal V and Taly A** (2019) Explainable AI in industry. *Proceedings of the 25th International Conference on Knowledge Discovery & Data Mining*. ACM SIGKDD, pp. 3203–3204.
- Gao F, Yang Y, Wang J, Sun J, Yang E and Zhou H** (2018) A deep convolutional generative adversarial networks-based semi-supervised method for object recognition in synthetic aperture radar. *Remote Sensing* 10, 846.

- Geng Y and Cassandras CG** (2011) A new “smart parking” system based on optimal resource allocation and reservations. *Proceedings of the 14th International Conference on Intelligent Transportation Systems*. IEEE, pp. 979–984.
- Gershenson C, Trianni V, Werfel J and Sayama H** (2018) Self-organization and artificial life: a review. *Proceedings of the Artificial Life Conference*. Cambridge, MA, USA: MIT Press, pp. 510–517.
- Gheraibia Y, Kabir S, Aslansefat K, Sorokos I and Papadopoulos Y** (2019) Safety+ AI: a novel approach to update safety models using artificial intelligence. *IEEE Access* 7, 135855–135869.
- Gold N, Mohan A, Knight C and Munro M** (2004) Understanding service-oriented software. *IEEE Software* 21, 71–77.
- Gutierrez C, Garbajosa J, Diaz J and Yague A** (2013) Providing a consensus definition for the term “smart product”. *Proceedings of the 20th IEEE International Conference and Workshops on Engineering of Computer Based Systems*, Scottsdale, AZ, USA, pp. 203–211.
- Haase VH** (1990) The use of AI-methods in the implementation of realtime software products. *IFAC Proceedings Volumes* 23, 247–251.
- Handosia M, Dasgupta A, Manuel M and Gračanin D** (2020) Rethinking user interaction with smart environments – a comparative study of four interaction modalities. *Proceedings of the International Conference on Human-Computer Interaction*. Cham: Springer, pp. 39–57.
- Hartmann P** (2014) Behavior planning. In *Dependability of Self-optimizing Mechatronic Systems*.
- Haruna K, Akmar Ismail M, Suhendroyono S, Damiasih D, Pierewan AC, Chiroma H and Herawan T** (2017) Context-aware recommender system: a review of recent developmental process and future research direction. *Applied Sciences* 7, 1211.
- He W and Yang X** (2019) Artificial intelligence design, from research to practice. *Proceedings of the International Conference on Computational Design and Robotic Fabrication*. Singapore: Springer, pp. 189–198.
- Hechler E, Oberhofer M and Schaeck T** (2020) The operationalization of AI. In *Deploying AI in the Enterprise*. Berkeley, CA: Apress, pp. 115–140.
- Herring JP** (1925) The nature of intelligence. *Journal of Educational Psychology* 16, 505–522.
- Hewitt C and De Jong P** (1984) Open systems. In Brodie ML, Mylopoulos J and Schmidt JW, (eds), *On Conceptual Modelling*. New York, NY: Springer, pp. 147–164.
- Hicking J, Zeller V and Schuh G** (2018) Goal-oriented approach to enable new business models for SME using smart products. *IFIP Advances in Information and Communication Technology, Product Lifecycle Management to Support Industry 4.0*. Cham: Springer International Publishing, pp. 147–158.
- Horváth I** (2012) Recent developments in computer supported cooperative work in design: from group collaboration through global connectivity to informing apobetics. *Proceedings of the 16th International Conference on Computer Supported Cooperative Work in Design*. IEEE, pp. 2–13.
- Horváth I** (2019) A computational framework for procedural abduction done by smart cyber-physical systems. *Designs* 3, 1.
- Horváth I** (2020a) Position statement: how are smart design and smart systems shaking hands? *Repository of the Smart Design of Smart Systems Workshop of the SDPS 2020 On-Line Conference*, 28 November 2020, pp. 1–38.
- Horváth I** (2020b) Sympéramology: a proposal for the theory of synthetic system knowledge. *Designs* 4, 1–24.
- Horváth I, Rusák Z, Hou Y and Ji L** (2014) On some theoretical issues of interaction with socialized and personalized cyber-physical systems. *Proceedings of the “Informatik 2014” Conference*, pp. 1–6.
- Horváth I, Rusák Z and Li Y** (2017) Order beyond chaos: introducing the notion of generation to characterize the continuously evolving implementations of cyber-physical systems. *Proceedings of the ASME International Design Engineering Technical Conferences*, Vol. 58110. American Society of Mechanical Engineers, pp. 1–16.
- Hu Y, Li W, Wright D, Aydin O, Wilson D, Maher O and Raad M** (2019) Artificial intelligence approaches. *arXiv preprint arXiv:1908.10345*.
- Huang L** (2016) System intelligence: model, bounds and algorithms. *Proceedings of the 17th ACM International Symposium on Mobile Ad Hoc Networking and Computing*, pp. 171–180.
- Jameson A** (2007) Adaptive interfaces and agents. In Sears A and Jacko SA, (eds), *The Human-Computer Interaction Handbook*. Boca Raton: CRC Press, pp. 459–484.
- Jia X, Ren L and Cai J** (2020) Clinical implementation of AI technologies will require interpretable AI models. *Medical Physics* 47, 1–4.
- Kamal Kaur R, Pandey B and Singh LK** (2018) Dependability analysis of safety critical systems: issues and challenges. *Annals of Nuclear Energy* 120, 127–154.
- Karan E and Asadi S** (2019) Intelligent designer: a computational approach to automating design of windows in buildings. *Automation in Construction* 102, 160–169.
- Kasabov NK** (2019) Evolving processes in time-space. Deep learning and deep knowledge representation in time-space. Brain-inspired AI. In *Time-Space, Spiking Neural Networks and Brain-Inspired Artificial Intelligence*. Berlin, Heidelberg: Springer, pp. 3–37.
- Kesavan A, John S and Herszberg I** (2008) Structural health monitoring of composite structures using artificial intelligence protocols. *Journal of Intelligent Material Systems and Structures* 19, 63–72.
- Khan F, Eker OF, Sreenuch T and Tsourdos A** (2014) Multi-domain modeling and simulation of an aircraft system for advanced vehicle-level reasoning research and development. *International Journal of Advanced Computer Science and Applications* 5, 86–96.
- Kinouchi Y and Kato Y** (2013) A model of primitive consciousness based on system-level learning activity in autonomous adaptation. *International Journal of Machine Consciousness* 5, 47–58.
- Kinouchi Y and Mackin KJ** (2018) A basic architecture of an autonomous adaptive system with conscious-like function for a humanoid robot. *Frontiers in Robotics and AI* 5, 30.
- Kitagawa S, Wada K, Hasegawa S, Okada K and Inaba M** (2018) Multi-stage learning of selective dual-arm grasping based on obtaining and pruning grasping points through the robot experience in the real world. *Proceedings of the 2018 International Conference on Intelligent Robots and Systems*. IEEE, pp. 7123–7130.
- Ko H, Marreiros G, Morais H, Vale Z and Ramos C** (2012) Intelligent supervisory control system for home devices using a cyber-physical approach. *Integrated Computer-Aided Engineering* 19, 67–79.
- Koch J, Lucero A, Hegemann L and Oulasvirta A** (2019) May AI? Design ideation with cooperative contextual bandits. *Proceedings of the CHI Conference on Human Factors in Computing Systems*, pp. 1–12.
- Kuwabara K, Ishida T and Osato N** (1995) AgenTalk: Coordination protocol description for multiagent systems. *Proceedings of the First International Conference on Multi-Agent Systems*, Vol. 95, pp. 455–461.
- Li Y, Horváth I and Rusák Z** (2020) Personalized messaging based on dynamic context assessment: application in an informing cyber-physical system. *Journal of Integrated Design and Process Science* 23, 1–21.
- Liao QV, Gruen D and Miller S** (2020) Questioning the AI: informing design practices for explainable AI user experiences. *Proceedings of the CHI Conference on Human Factors in Computing Systems*, pp. 1–15.
- Lieberman H, Fry C and Rosenzweig E** (2014) The new era of high-functionality interfaces. *Proceedings of the International Conference on Agents and Artificial Intelligence*. Cham: Springer, pp. 3–10.
- Lin JS, Chang JH and Yang SY** (2017) Develop a web-based platform using user-oriented design for knowledge management system. *Proceedings of the International Conference on Industrial Engineering, Management Science and Application*. IEEE, pp. 1–5.
- Litster J and Bogle ID** (2019) Smart process manufacturing for formulated products. *Engineering* 5, 1003–1009.
- Loizou S, Elgammal A, Kumara I, Christodoulou P, Papazoglou MP and Andreou AS** (2019) A smart product co-design and monitoring framework via gamification and complex event processing. *Proceedings of the 21st International Conference on Enterprise Information Systems*, pp. 237–244.
- Luis-Ferreira F, Sarraipa J and Goncalves R** (2019) Smartification of home appliances for safety assessment and risk alert. *IFAC-PapersOnLine* 52, 207–211.
- Luyten K and Coninx K** (2005) Distributed user interface elements to support smart interaction spaces. *Proceedings of the Seventh International Symposium on Multimedia*. IEEE Computer Society, pp. 277–286.
- Malik V and Singh S** (2020) Artificial intelligent environments: risk management and quality assurance implementation. *Journal of Discrete Mathematical Sciences and Cryptography* 23, 187–195.

- Mallikarjuna BK, Chronopoulos C and Kozin I** (2020) The concept of smartness in cyber-physical systems and connection to urban environment. *Annual Reviews in Control*. doi:10.1016/j.arcontrol.2020.10.0091367-5788/
- Mattern S** (2018) Calculative composition: the ethics of automating design. In Dubber MD, Pasquale F and Das S (eds), *The Oxford Handbook of Ethics of AI*. Oxford: Oxford University Press, pp. 1–20.
- Matthews ML, Bryant DJ, Webb RD and Harbluk JL** (2001) Model for situation awareness and driving: application to analysis and research for intelligent transportation systems. *Transportation Research Record* **1779**, 26–32.
- Mayer S, Tschofen A, Dey AK and Mattern F** (2014) User interfaces for smart things – a generative approach with semantic interaction descriptions. *ACM Transactions on Computer-Human Interaction* **21**, 1–25.
- McCormack J, Hutchings P, Gifford T, Yee-King M, Llano MT and d’Inverno M** (2020) Design considerations for real-time collaboration with creative artificial intelligence. *Organised Sound* **25**, 41–52.
- Meisenberg G and Lynn R** (2011) Intelligence: a measure of human capital in nations. *The Journal of Social, Political, and Economic Studies* **36**, 421–454.
- Minton SN** (2017) The value of AI tools: some lessons learned. *AI Magazine* **38**, 99–101.
- Muccini H and Vaidhyathan K** (2019) A machine learning-driven approach for proactive decision making in adaptive architectures. *Proceedings of the International Conference on Software Architecture Companion*. IEEE, pp. 242–245.
- Mucha T and Seppala T** (2020) *Artificial Intelligence Platforms – A New Research Agenda for Digital Platform Economy*. Research Report No. 76, The Research Institute of the Finnish Economy, p. 141.
- Mühlhäuser M** (2008) Smart products: an introduction. In Mühlhäuser M, Ferscha A and Aitenbichler E (eds), *Communications in Computer and Information Science, Constructing Ambient Intelligence*. Berlin, Heidelberg: Springer, pp. 158–164.
- Neuhüttler J, Woyke IC and Ganz W** (2017) Applying value proposition design for developing smart service business models in manufacturing firms. *Proceedings of the International Conference on Applied Human Factors and Ergonomics*. Cham: Springer, pp. 103–114.
- Newman D, Hume S and Lang L** (2020) A systematic approach for applying AI methods on civilian applications and education. *International Journal of Modern Engineering Technologies* **2**, 2.
- Oh S, Jung Y, Kim S, Lee I and Kang N** (2019) Deep generative design: integration of topology optimization and generative models. *Journal of Mechanical Design* **141**.
- Ojo A, Mellouli S and Ahmadi Zeleti F** (2019) A realist perspective on AI-era public management. *Proceedings of the 20th Annual International Conference on Digital Government Research*, pp. 159–170.
- Papadopoulos G and Wiggins G** (1999) AI methods for algorithmic composition: a survey, a critical view and future prospects. *Proceedings of the AISB Symposium on Musical Creativity*, Vol. **124**, Edinburgh, UK, pp. 110–117.
- Parasuraman R, Sheridan TB and Wickens CD** (2000) A model for types and levels of human interaction with automation. *IEEE Transactions on Systems, Man, and Cybernetics - Part A: Systems and Humans* **30**, 286–297.
- Perera C, Zaslavsky A, Christen P and Georgakopoulos D** (2013) Context aware computing for the Internet of Things: a survey. *IEEE Communications Surveys & Tutorials* **16**, 414–454.
- Pessôa MV and Becker JM** (2020) Smart design engineering: a literature review of the impact of the 4th industrial revolution on product design and development. *Research in Engineering Design*, **31**, 1–21.
- Pichai S** (2018) AI at Google: our principles. *The Keyword* **7**, 1–3.
- Quanz B, Sun W, Deshpande A, Shah D and Park JE** (2020) Machine learning based co-creative design framework. *arXiv preprint arXiv:2001.08791*.
- Rajae T and Jafari H** (2020) Two decades on the artificial intelligence models advancement for modeling river sediment concentration: state-of-the-art. *Journal of Hydrology* **588**, 1–13.
- Reed SK and Pease A** (2017) Reasoning from imperfect knowledge. *Cognitive Systems Research* **41**, 56–72.
- Ren X and Chen Y** (2019) How can artificial intelligence help with space missions – a case study: computational intelligence-assisted design of space tether for payload orbital transfer under uncertainties. *IEEE Access* **7**, 161449–161458.
- Rijsdijk SA and Hultink EJ** (2009) How today’s consumers perceive tomorrow’s smart products. *Journal of Product Innovation Management* **26**, 24–42.
- Rindermann H and Ceci SJ** (2009) Educational policy and country outcomes in international cognitive competence studies. *Perspectives on Psychological Science* **4**, 551–568.
- Romero M, Guédria W, Panetto H and Barafort B** (2020) Towards a characterisation of smart systems: a systematic literature review. *Computers in Industry* **120**, 103224.
- Rosenblueth A, Wiener N and Bigelow J** (1943) Behavior, purpose and teleology. *Philosophy of Science* **10**, 18–24.
- Roth EM, Patterson ES, Mumaw RJ, Roth EM and Mumaw RJ** (2002) Cognitive engineering: Issues in user-centered system design. In *Encyclopedia of Software Engineering*, 2nd Edn. Marciniak J J (ed). New York: John Wiley & Sons.
- Rutten E, Marchand N and Simon D** (2017) Feedback control as MAPE-K loop in autonomous computing. *Software Engineering for Self-Adaptive Systems III. Assurances*. Cham: Springer, pp. 349–373.
- Sabatucci L, Seidita V and Cossentino M** (2018) The four types of self-adaptive systems: a metamodel. *Proceeding of the International Conference on Intelligent Interactive Multimedia Systems and Services*. Cham: Springer, pp. 440–450.
- Saracco R, Barra S, Carrelli C and Tiribelli P** (1990) OAM&P support software: current role and evolution. *Proceedings of the Global Telecommunications Conference and Exhibition*. IEEE, pp. 1488–1492.
- Schirner G, Erdogmus D, Chowdhury K and Padir T** (2013) The future of human-in-the-loop cyber-physical systems. *Computer* **46**, 36–45.
- Schuh G, Zeller V, Hicking J and Bernardy A** (2019) Introducing a methodology for smartification of products in manufacturing industry. *Procedia CIRP* **81**, 228–233.
- Seidel S, Berente N, Lindberg A, Lyytinen K and Nickerson JV** (2018a) Autonomous tools and design: a triple-loop approach to human-machine learning. *Communications of the ACM* **62**, 50–57.
- Seidel S, Schimmler S and Borghoff UM** (2018b) Understanding neural network decisions by creating equivalent symbolic AI models. *Proceedings of SAI Intelligent Systems Conference*. Cham: Springer, pp. 616–637.
- Seilonen I, Pirttioja T, Appelqvist P, Halme A and Koskinen K** (2003) Distributed planning agents for intelligent process automation. *Proceedings of the International Symposium on Computational Intelligence in Robotics and Automation*, Vol. **2**. IEEE, pp. 614–619.
- Shang C and You F** (2019) Data analytics and machine learning for smart process manufacturing: recent advances and perspectives in the big data era. *Engineering* **5**, 1010–1016.
- Sharvia S, Kabir S, Walker M and Papadopoulos Y** (2016) Model-based dependability analysis: state-of-the-art, challenges, and future outlook. In Mistrik I, Soley RM, Ali N, Grundy J and Tekinerdogan B (eds), *Software Quality Assurance*. Burlington, MA: Morgan Kaufmann, pp. 251–278.
- Shishkov B, Larsen JB, Warnier M and Janssen M** (2018) Three categories of context-aware systems. *Proceedings of the International Symposium on Business Modeling and Software Design*. Cham: Springer, pp. 185–202.
- Shu G and Lee D** (2007) Testing security properties of protocol implementations – a machine learning based approach. *Proceedings of the 27th International Conference on Distributed Computing Systems*. IEEE, p. 25.
- Simon HA** (1986) Whether software engineering needs to be artificially intelligent. *IEEE Transactions on Software Engineering* **7**, 726–732.
- Smith C** (2019) Intentionally ethical AI experiences. *Journal of Usability Studies* **14**, 181–186.
- Smithers T, Conkie A, Doheny J, Logan B, Millington K and Tang MX** (1990) Design as intelligent behaviour: an AI in design research programme. *Artificial Intelligence in Engineering* **5**, 78–109.
- Sondermann-Wölke C, Hemsel T, Sextro W, Gausemeier J and Pook S** (2010) Guideline for the dependability-oriented design of self-optimizing systems. *Proceedings of the 8th International Conference on Industrial Informatics*. IEEE, pp. 739–744.
- Srivastava S and Singh AP** (2009) Testing of embedded system using fault modeling. *Proceedings of the International Conference on Emerging Trends in Electronic and Photonic Devices & Systems*. IEEE, pp. 177–180.

- Subramanyam S and Lu SC** (1991) The impact of an AI-based design environment for simultaneous engineering on process planning. *International Journal of Computer Integrated Manufacturing* **4**, 71–82.
- Sun W, Ma QY, Gao TY and Chen S** (2010) Knowledge-intensive support for product design with an ontology-based approach. *The International Journal of Advanced Manufacturing Technology* **48**, 421–434.
- Tang MX** (1997) A knowledge-based architecture for intelligent design support. *The Knowledge Engineering Review* **12**, 387–406.
- Tao F, Sui F, Liu A, Qi Q, Zhang M, Song B and Nee AY** (2019) Digital twin-driven product design framework. *International Journal of Production Research* **57**, 3935–3953.
- Tavčar J and Horváth I** (2018) A review of the principles of designing smart cyber-physical systems for run-time adaptation: learned lessons and open issues. *IEEE Transactions on Systems, Man, and Cybernetics: Systems* **49**, 145–158.
- Torres E and Penman W** (2020) An emerging AI mainstream: deepening our comparisons of AI frameworks through rhetorical analysis. *AI & Society*, 1–12 (Published online: 22 October 2020).
- Trokhimchuck PP** (2017) Theories of open systems: realities and perspectives. *International Journal of Innovative Science and Research Technology* **2**, 51–60.
- Tsukuda M, Arimoto K, Asakura M, Hidaka H and Fujishima K** (1993) A smart design methodology with distributed extra gate-arrays for advanced ULSI memories. *IEICE Transactions on Electronics* **76**, 1589–1594.
- Ulsoy AG** (2019) Smart product design for automotive systems. *Frontiers of Mechanical Engineering* **14**, 102–112.
- Varshney LR, Keskar NS and Socher R** (2019) Pretrained AI models: performance, mobility, and change. *arXiv preprint arXiv:1909.03290*.
- Venkataramani S, Sun X, Wang N, Chen CY, Choi J, Kang M and Gopalakrishnan K** (2020) Efficient AI system design with cross-layer approximate computing. *Proceedings of the IEEE* **108**, 2232–2250.
- Vroom RW and Horváth I** (2014) Cyber-physical augmentation: an exploration. *Proceedings of the 10th International Tools and Methods of Competitive Engineering Symposium*.
- Wang L** (2019) From intelligence science to intelligent manufacturing. *Engineering* **5**, 615–618.
- Wang J, Ma Y, Zhang L, Gao RX and Wu D** (2018) Deep learning for smart manufacturing: methods and applications. *Journal of Manufacturing Systems* **48**, 144–156.
- Weyns D** (2019) Software engineering of self-adaptive systems. In Cha S, Taylor RN and Kang K (eds), *Handbook of Software Engineering*. Cham: Springer, pp. 399–443.
- Woods DD and Roth EM** (1988) Cognitive engineering: human problem solving with tools. *Human Factors* **30**, 415–430.
- Wu Y, Li G, Wang L, Ma Y, Kolodziej J and Khan SU** (2012) A review of data intensive computing. *Proceedings of the 12th International Conference on Scalable Computing and Communications*, Changzhou, China, pp. 1–6.
- Wuest T, Schmidt T, Wei W and Romero D** (2018) Towards (pro-)active intelligent products. *International Journal of Product Lifecycle Management* **11**, 154–189.
- Yamanobe N, Wan W, Ramirez-Alpizar IG, Petit D, Tsuji T, Akizuki S, Hashimoto M, Nagata K and Harada K** (2017) A brief review of affordance in robotic manipulation research. *Advanced Robotics* **31**, 1086–1101.
- Yang X, Moore PR, Wong CB, Pu JS and Chong SK** (2007) Product lifecycle information acquisition and management for consumer products. *Industrial Management & Data Systems* **107**, 936–953.
- Yang Q, Scuito A, Zimmerman J, Forlizzi J and Steinfeld A** (2018) Investigating how experienced UX designers effectively work with machine learning. *Proceedings of the Conference on Designing Interactive Systems, Hong Kong, China*. Denver, CO, USA: ACM Press, pp. 585–596.
- Zatsman I** (2020) Three-dimensional encoding of emerging meanings in AI-systems. *Proceedings of the 21st European Conference on Knowledge Management*, pp. 44–42.
- Zha XF, Sriram RD and Lu WF** (2003) Knowledge intensive collaborative decision support for design process. *Proceedings of the International Design Engineering Technical Conferences*, Vol. **37009**, pp. 425–438.
- Zheng P, Wang Z and Chen CH** (2019) Industrial smart product-service systems solution design via hybrid concerns. *Procedia CIRP* **83**, 187–192.
- Zhou L, Pung HK, Ngoh LH and Gu T** (2006) Ontology modeling of a dynamic protocol stack. *Proceedings of the Conference on Local Computer Networks*. IEEE, pp. 353–360.
- Zysman J and Nitzberg M** (2020) Governing AI: understanding the limits, possibility, and risks of AI in an era of intelligent tools and systems. BRIE Working Paper # 2020-5, pp. 1–28.

Dr. Imre Horváth is an emeritus professor of the Delft University of Technology, where he focused on cognitive engineering of smart cyber-physical systems. He promoted more than 20 PhD students and has more than 430 publications. He is a fellow of ASME and a member of the Royal Dutch Institute of Engineers. He received two honorary doctor titles, the ASME lifetime achievement award, and the Pahl-Beitz ICONNN award. He has served several international journals as an editor. He is an initiator of the International Tools and Methods of Competitive Engineering (TMCE) Symposia. His current research interest is knowledge science of intellectualized systems.